

Loovent TM (01)



Powerful centrifugal fan for wall/ceiling mounting

Highly reliable and powerful fan in a modular design for ease of installation & maintenance. **Loovent TM** designed to provide extraction levels that comply with the latest **Building Regulations ADF**

Controlled by adjustable timer from a light or door switch. It can be recessed or surface mounted.

Features

- Conforms to IPX4 rating
- 'Make Good' bezel supplied.
- For use with up to 16m of PVC pipe or flexible ducting,
- Can be surface mounted to a wall or ceiling
- Integral magnetic anti-backdraft flap
- Carries TÜV approval
- Thermally protected motor
- Complies with the latest Building Regulations ADF 2006
- Extracts up to 31l/sec, 111 m3/hr
- Quality assured to ISO9001
- Fixing pack supplied plus a range of optional ventilation accessories
- 3 Year warranty

Model: TM(01C)
Part No: 71766401



A healthy indoor environment is an important contributing factor to the wellbeing of both a building and its occupants. Ventilation with fresh air is the most effective means of avoiding problems such as condensation, mould and allergies.


The 100mm Loovent Fan offers comprehensive choice of control, using a 'plug-in' modular system, whilst ensuring efficient ventilation, which can be used with 100mm ducting. They are the ideal solution for removing damp moist air, odours and airborne pollutants from en-suites, bathrooms and utility rooms

An excellent ventilation fan with comfort and convenience combined...

Application

For use in en-suites, toilets, bathrooms and utility rooms

Loovent TM (01)

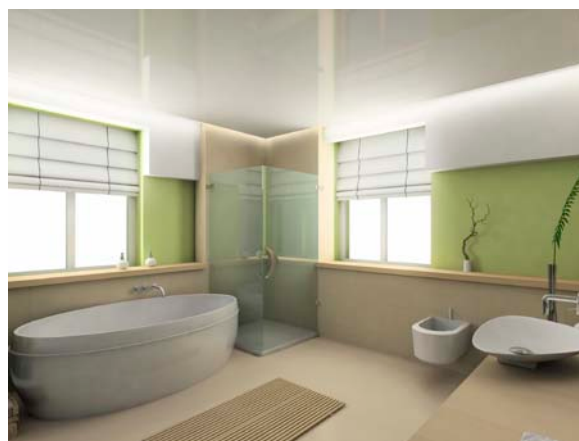

For more information please visit airflow.com or email us at info@airflow.com or call **01494 560800**



Loovent TM (01)

Why Ventilate?


AIRFLOW fans exceed the requirements of the latest building regulations helping to combat the harmful effects of dampness and condensation and by extracting airborne pollutants such as odours, cooking smells, humid and stale air. The potential hazards to health for occupants and possible damage to the fabric of the building can be largely eliminated.



WHAT THE REGULATIONS SAY.

The latest edition of the Building Regulations, Approved Document (F1) Means of Ventilation, effective 1st April 2006, stipulates the provision of adequate mechanical ventilation rates in non-habitable rooms, such as Toilets, Bathrooms/Shower rooms, Kitchens and Utility rooms in domestic dwellings.

Unit Dimensions (mm)

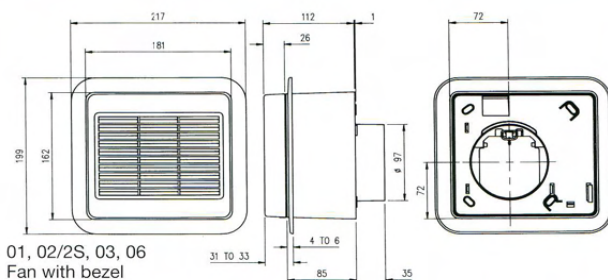


ROOMS CONTAINING OPENING WINDOWS

EXTRACT VENTILATION RATES


Toilet /Sanitary accommodation – 6 l/sec (22m3/hr)
Bathroom/Shower Room – 15 l/sec (54 m3/hr)
Kitchen with cooker hood – 30 l/sec (108 m3/hr)
Kitchen without cooker hood – 60 l/sec (216 m3/hr)
Utility Room – 30 l/sec (108 m3/hr)

Note: Above is basic guidance. Please refer to ADF for full Regulations



Model	Extract Performance		Watts	db(A) @ 3m	Amps	Supply Voltage	Dimensions h x w x d (cm)	Material finish	Weight (KG)
	m3/hr	l/sec							
TM (01)	111	31	30	41/58	2	230V / 1PH / 50Hz	16.2x18.1x11.2	ABS	1.5

AIRFLOW VENTILATION SOLUTIONS

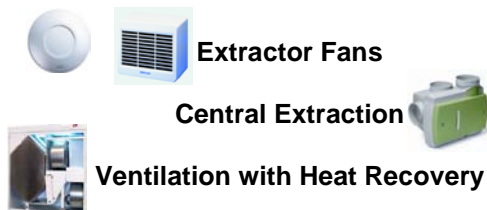

Accessories

An approved range of quality accessories comprising flexible and rigid ducting, grills and controls are available.

For more information please visit airflow.com or email us at info@airflow.com or call **01494 560800**

