

SCREWLESS – 13A SOCKET with USB

These instructions should be read carefully and retained after installation for further reference and maintenance.

SAFETY

- Before installation/maintenance, ensure that the mains supply is switched off and the circuit fuses are removed or circuit breakers switched off
- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations and current Building Regulations. If in any doubt, consult a qualified electrician
- 230V 50Hz
- Do not overload this accessory or subject it to conditions outside its rating
- Please recycle

SCREWLESS FRONT PLATE FIXING

- Always ensure the wall surface is flat and smooth
- Remove the front plate by placing a medium size flat-head screwdriver in the notch at the side and lever off gently.
- Fix the main unit to the back box using the fixing screws supplied
- Clip the front plate back onto the main assembly ensuring the screwdriver notch is at the side
- The main unit is fitted with a gasket, this **MUST NOT** be removed, this gasket is to stop discolouration of the front plate due to natural moisture in some wall finishes
- To maintain the finish of this product, periodically wipe over with a soft dry cloth only

INSTALLATION

- Connect this accessory as per the wiring diagram below
- All earth connections must be made and maintained. Use green/yellow sleeving on earth conductors that are not insulated
- Fit the unit into a suitable wall box taking care not to compress, damage or trap any cables, and secure with the screws provided
- Check all connections are secure

WIRING

L – LIVE – Brown

N – NEUTRAL – Blue

 – **EARTH – Green and yellow**


- All Screwless products **MUST** have an earth connection between the front plate and back box

*** Note – if your installation uses four lug metal mounting box, remove the top and bottom lugs or bend fully back**

IF IN ANY DOUBT PLEASE CONSULT A QUALIFIED ELECTRICIAN

Wiring Diagram

2 GANG 13 AMP SWITCHED SOCKET

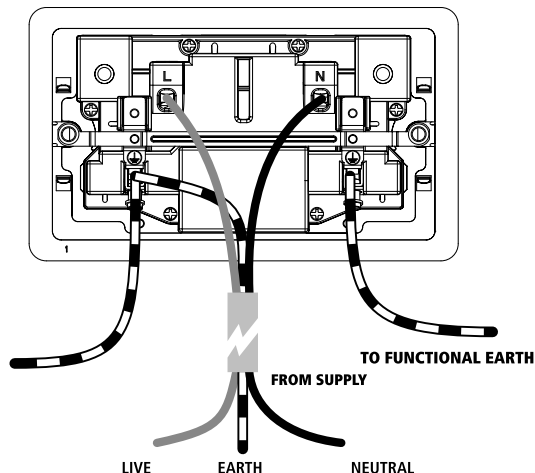

USB Charger Specification

Output Voltage: 5V

Total Output Current: Max. 2400mA



CAUTION

This socket is designed for charging portable USB devices only and contains a short circuit and overload protection feature. If there is no power from the USB socket unplug the connected device. Check to ensure the USB socket and USB device have not come into contact with water, liquid or debris and the cable to the device is not damaged. With no device connected to the USB socket it will automatically reset and be ready for use.



This unit should NOT be subject to any insulation resistance testing, failure to follow this instruction could cause damage to the USB circuit and void the warranty.

WARRANTY

This product has a warranty of 3 years from date of purchase. Failure to install in accordance with the current edition of the IEE Wiring regulations (BS7671), improper use or removal of the batch codes will invalidate the warranty. If this product should fail within its warranty period it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.

This equipment was designed with an Overvoltage Category III circuit, this provides better voltage insulation for the equipment in fixed installations.

Knightsbridge[®]
the mark of quality