

Aura H



Low profile axial fan for wall/ceiling mounting

Highly reliable and powerful fan in a modular design for ease of installation & maintenance. **Aura H** is designed to provide extraction levels that comply with the latest **Building Regulations ADF**

Integral adjustable humidity sensor – between 40%-90% RH. Can be recessed into wall or ceiling.

Features

- Slim, compact styling, quick and easy to fit
- Wall or ceiling mounted
- CE, IPX4 rating and double insulated
- Powerful ventilation up to 85 m³/hr
- Quiet, only 41 dB(A)
- Compatible with 100mm flexible and PVC ducting and can be ducted over short lengths
- Easy to wipe clean
- Adjustable humidity sensor
- 2 Year warranty

Model: Aura H

Part No: 72650501



A healthy indoor environment is an important contributing factor to the wellbeing of both a building and its occupants. Ventilation with fresh air is the most effective means of avoiding problems such as condensation, mould and allergies.

The Aura range of fans are slim, compact, attractively styled, easy to wipe clean and ducted over short lengths. They are the ideal solution for removing damp moist air, odours and airborne pollutants from toilets and bathrooms.



An excellent ventilation fan for every home, décor and budget...

Application

For use in toilets, en-suites and bathrooms.



Aura H

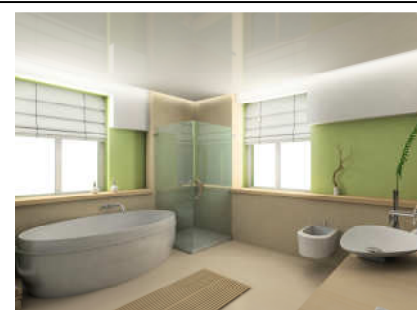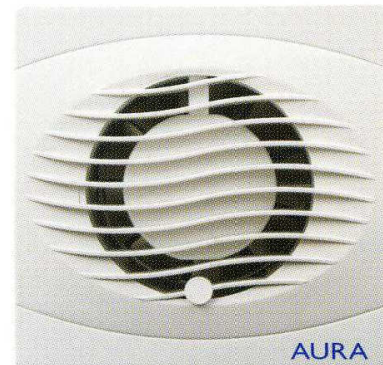

For more information please visit airflow.com or email us at info@airflow.co.uk or call **01494 560800**

AIRFLOW™

Aura H

Why Ventilate?

AIRFLOW fans exceed the requirements of the latest building regulations helping to combat the harmful effects of dampness and condensation and by extracting airborne pollutants such as odours, cooking smells, humid and stale air. The potential hazards to health for occupants and possible damage to the fabric of the building can be largely eliminated.



WHAT THE REGULATIONS SAY.


The latest edition of the Building Regulations, Approved Document (F1) Means of Ventilation, effective 1st April 2006, stipulates the provision of adequate mechanical ventilation rates in non—habitable rooms, such as Toilets, Bathrooms/Shower rooms, Kitchens and Utility rooms in domestic dwellings.

ROOMS CONTAINING OPENING WINDOWS EXTRACT VENTILATION RATES

- Toilet /Sanitary accommodation – 6 l/sec (22m3/hr)
- Bathroom/Shower Room – 15 l/sec (54 m3/hr)
- Kitchen with cooker hood – 30 l/sec (108 m3/hr)
- Kitchen without cooker hood – 60 l/sec (216 m3/hr)
- Utility Room – 30 l/sec (108 m3/hr)


Note: Above is basic guidance. Please refer to ADF for full Regulations

Unit Dimensions (mm)




A-163 (square)

B-25



Model	Extract Performance		Watts	db(A) @ 3m	Amps	Supply Voltage	Dimensions h x w x d (cm)	Material finish	Weight (KG)
	m3/hr	l/sec							
Aura H	85	24	25	41	2	230V / 1PH / 50Hz	16.3 x 16.3 x 2.5	ABS	0.463

AIRFLOW VENTILATION SOLUTIONS

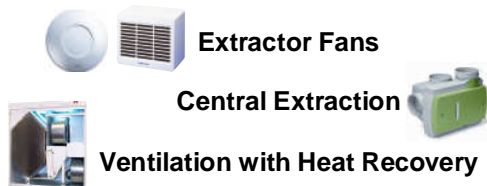

Extractor Fans

Central Extraction

Ventilation with Heat Recovery

Accessories

Description	Part No.
Cavity wall kit (Terracotta)	72643201
Cavity wall kit (White)	72643202
Flexible duct kit (Terracotta)	72643601
Flexible duct kit (White)	72643601

For more information please visit airflow.com or email us at info@airflow.co.uk or call **01494 560800**

