

# Accona

## Timer Panel Heater

0.5, 1.0, 1.5, 2.0 and 2.4 kW



p.110

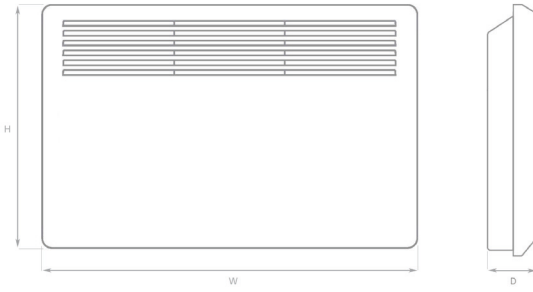
### Usage

Ideal for a wide range of fixed installation heating applications in the home and office environment.

### Features and Benefits

- Stylish curved slimline design
- Ecodesign compliant
- Available in 0.5, 1.0, 1.5, 2.0 and 2.4 kW models
- 24/ 7 LED electronic timer
- Manual or timer operation setting
- Timer configurable in 1 hour slots
- Temperature range 5 - 30°C
- Open window detection to reduce energy wastage
- Power on display
- Element on indicator
- Full or half power setting
- Frost protection setting at 5°C
- Easy to use control panel
- IP24 splash-proof
- Integrated child lock
- Wall mounted - secure bracket included
- Slimline - depth only 90mm
- White finish

Product Code	Power (kW)	Timer	Current (amps)
AC500T	0.5	Yes	2.2
AC1000T	1.0	Yes	4.3
AC1500T	1.5	Yes	6.5
AC2000T	2.0	Yes	9.0
AC2400T	2.4	Yes	10.4

**Outer Casing**

Powder coated steel

**Element**

Aluminium x-shape heating element

**Controls**

Digital controls and screen

**Louvres**

0.5 and 1.0 kW have two columns of louvres

1.5 kW has three columns of louvres

2.0 kW and 2.4 kW has four columns of louvres

**Safety**

Overheat temperature protection.

**IP Rating**

IP24

**Installation**

Wall mounting kit included and must be used.

**Electrical Connection**

Installation must comply with current IEE regulations.

The product should be connected to the fixed wiring of the property via a double pole fused spur with a minimum break capacity of 13 amps.

Cable pre-wired (1.8m), white cable, entry to the top right of the unit.

Class I

**Approvals**

CE

**Standard Warranty**

1 year parts or replacement warranty.

Product Code	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
AC500T	400	460	90	3.4
AC1000T	400	460	90	3.4
AC1500T	400	595	90	4.7
AC2000T	400	830	90	5.7
AC2400T	400	950	90	7.4