

EVENTUALLY, YOU MAY WANT TO REPLACE THIS PRODUCT:

When your product comes to the end of its life or you choose to update or upgrade it by replacing it, please do not dispose of it with your normal household waste, please recycle where facilities exist. When you need to dispose of this product, check with your retailer or local authority for suitable options. New regulations require the recycling of Waste from Electrical and Electronic Equipment (European "WEEE Directive" effective August 2005—UK WEEE Regulations effective 2nd January 2007). Environment Agency Registered Producer: WEE/GA0248QZ.




IF YOU EXPERIENCE PROBLEMS:

If your product is defective or develops a fault, please return it to the place where you bought it. You can call our Helpline for advice. The Helpline will gladly give advice on any aspect of any Eterna Lighting product but may not be able to give specific instructions regarding individual installations.

If in doubt, consult a qualified electrician.



SAFETY AND INSTALLATION INSTRUCTIONS

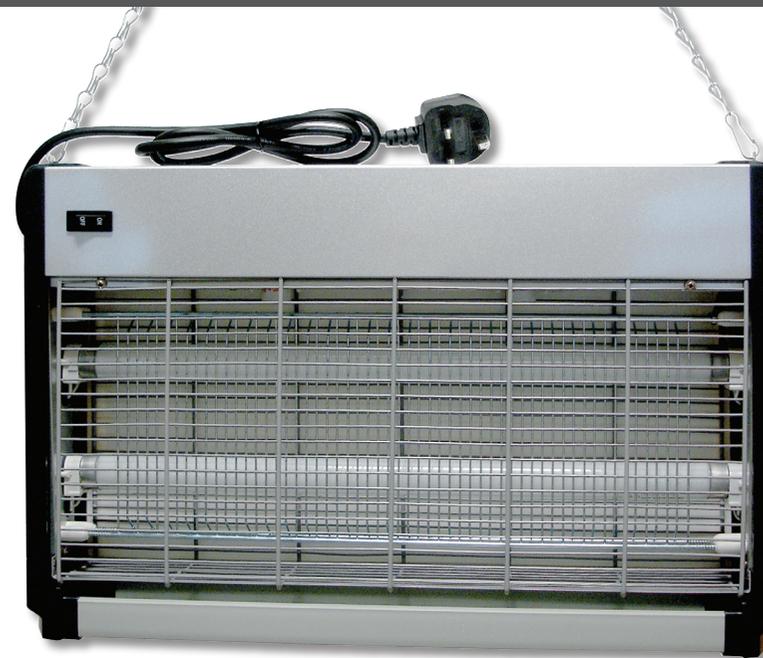

Pack contents:

- Insect Killer
- 2 x 15W UV Insecticidal Fluorescent Tubes
- Hanging Chain

Model:

IK100M

Insect Killer - 100m² Coverage

These instructions are provided as a guideline to assist you.

PLEASE READ THESE INSTRUCTIONS BEFORE INSTALLING YOUR NEW FITTING

PLEASE RETAIN FOR FUTURE REFERENCE

110211-1EJ



HELPLINE:

- T: 01933 673 144
- F: 01933 678 083
- E: sales@eterna-lighting.co.uk

Visit our website:

www.eterna-lighting.co.uk

General Information and Safety Instructions:

READ THIS FIRST:

Check the pack and make sure you have all of the parts listed on the front of this booklet. If not, contact the outlet where you bought this product.

This product contains glass, care must be taken when assembling, fitting or handling to prevent personal injury or damage to the product.

If you intend to cut off the plug and permanently connect to the mains via a fused spur or other connection box, this product must be installed by a competent person in accordance with the Building Regulations making reference to the current edition of the IEE Wiring Regulations (BS7671). The Building Regulations may be obtained from OPSI (Office for Public Sector Information) or the department of Communities and Local Government and viewed and downloaded from www.communities.gov.uk following the link for Building Regulations.

As the buyer, installer and/or user of this product it is your own responsibility to ensure that this fitting is fit for the purpose for which you have intended it. Eterna Lighting cannot accept any liability for loss, damage or premature failure resulting from inappropriate use.

If in any doubt, consult a qualified electrician.

The lamps (bulbs/tubes) and starters supplied with this fitting are consumable parts and therefore may be outside of any warranty offered.

Switch off the mains before commencing installation and remove the appropriate circuit fuse.

When working at heights, please use a suitable platform.

Do not use the product without the safety grid fitted.

Suitable for indoor use only.

This product is not suitable for use in areas constantly subject to moisture and should be fitted where it cannot be splashed.

This product must not be installed in areas that contain flammable gasses (garages, farm buildings etc)

Before making fixing hole(s), check that there are no obstructions hidden beneath the mounting surface such as pipes or cables.

If the location of your new fitting requires the provision of a new electrical supply, the supply must conform with the requirements of the Building Regulations making reference to the current edition of the IEE Wiring Regulations (BS7671).

The cores in the mains lead are coloured in accordance with the following code:
Live - Brown or Red
Neutral - Blue or Black
Earth - Green and Yellow

This product must be connected to Earth.

If the plug supplied fitted to this product is not suitable for your socket outlets, cut the plug off and destroy it. Fit an appropriate plug.

WARNING! The plug cut off of the mains lead with conductors exposed will be dangerous if inserted into a socket.

This product is not intended to be used by children and persons with sensory, physical and/or mental impairments that would prevent them from using it safely.

We recommend that this is installed out of reach of small children. For best coverage, install near to the ceiling.

IMPORTANT - Always switch off at the socket and remove the plug before changing the lamp.

The plug is fitted with a 3 Amp fuse. When replacing, use only a 3 Amp fuse approved to BS1362 and carrying the relevant approval mark. Never use the plug with the fuse omitted.

If the external flexible cable of this luminaire is damaged it shall be exclusively replaced by repair or service agent or similar qualified person.

WARNING:

Very high voltages are present on the internal grid of this product, it must be installed where it cannot be touched.

Foreign objects must not be inserted through the external grid.

Always disconnect the power before removing the insect tray for cleaning.

Installation:

INSTALLATION:

1. It is recommended that the insect killer is suspended from the chain that is supplied with the product.
2. Fit two large hooks or other secure suspension fixings to your wall or ceiling from which to hang the chain. We recommend fitting the hooks approximately 480mm (19") apart.
3. Ensure that the chain is securely fitted to the fixings on the insect killer. Lift fixings on each side of the insect killer to insert the hook through the hole.
4. Insert the plug into a convenient socket and position the supply cable so that it does not come into contact with the wire frame. Loop and tie excess cable.
5. Restore the power and switch on.

CLEANING:

Disconnect the power and clean the exterior of this fitting with a clean dry cloth

The tray should be regularly removed, cleaned and refitted. You can use a plastic brush on the wire grid.

LAMP REPLACEMENT:

Switch off the electricity at the mains and remove plug.

Release the wire grid by removing the 4 screws.

Rotate the lamp 90° and remove.

Fit the new lamp and rotate 90° into place.

Replace the wire grid ensuring the screws are tightened securely.

Switch power back on.

REPLACEMENT LAMP TYPE:

Wattage: 2 x 15W

Supply Voltage: 240V

Size / Type: T8 UV Insecticidal fluorescent Tube