


## Pico® Wireless Control and Mounting Accessories

(for regions other than North, Central, and South America)

The Pico® wireless control is a flexible and easy to use device that allows the user to control Lutron® wireless load control devices from anywhere in the space. This battery operated control requires no external wiring.

### Features

- Provides control for the following (depending on model number):
  - Maestro Wireless® controls
  - PowPak® Modules
  - Sivoia® QS wireless systems
  - Energi Savr Node™ and Quantum® systems, through the use of a QS sensor module (QSM)
  - GRAFIK Eye® QS systems
  - RadioRA® 2 systems
  - HomeWorks® QS wireless systems
  - Rania® wireless controls
  - Serena® Shades
  - myRoom™ Prime
  - myRoom™ Plus
- Control available in a variety of button marking options.
- Easy reconfiguration for use as:
  - Handheld remote
  - Wall mount control (with or without faceplate; faceplate adapter kit sold separately; see page 10)
  - A table top control (table top pedestal sold separately).
- Battery powered Pico® wireless control requires no wiring.
- 10 year battery life\*.
- One (1) CR2032 battery included.
- Can provide control of blinds, curtains, or lighting devices within a range of 9 m (30 ft) through walls and 18 m (60 ft) line-of-sight\*\*.

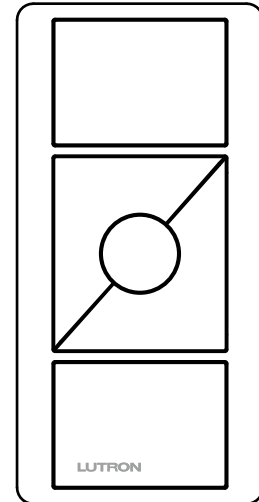

**Pico® wireless control**  
(3BRL model shown)

\* Based on a 1 year shelf life, an average of 10 button presses per day, and an ambient temperature of 30 °C (86 °F). Actual life may vary based on usage and environmental conditions.

\*\* Model numbers starting with "PP-" have a range of 7 m (23 ft).

<b>Job Name:</b>	<b>Model Numbers:</b>
<b>Job Number:</b>	

## Specifications

### Regulatory Approvals

- Lutron® Quality Systems registered to ISO 9001:2008.
  - PK
    - TRA Certified
    - CE Marked
  - PM
    - SRRC Certified
    - iDA Certified
  - PN
    - WPC Certified
  - PP
    - Certified by ULR Japan
  - PQ
    - CE Marked
    - C-Tick Marked

### Power

- Operating voltage 3 V $\equiv$
- One (1) CR2032 battery (included)

### System Communication and Capacity

- Pico® wireless controls communicate using Radio Frequency (RF). See “Frequency/Channel Codes” in the **Model Number** section for more information.
- Unique system addresses prevent interference between systems.
- Pico® wireless controls can be assigned to control shades or lighting devices that are within a range of 9 m (30 ft) through walls and 18 m (60 ft) line-of-sight\*.

### Mounting Considerations

- Mounting of any RF device on or in close proximity to a metal surface will drastically reduce the effective range of radio signal transmission or reception.
- All RF devices must be mounted on non-conductive materials to ensure proper performance.
- If you wish to mount your Pico® wireless control to a metal surface, the PICO-MOUNT-1-XX-CPN5733 will be required in order to maintain proper RF performance. For availability, please contact your local Lutron® sales office.

### Environment

- Ambient operating temperature: 0 °C to 60 °C (32 °F to 140 °F)
- Maximum 90%, non-condensing relative humidity
- Indoor use only

### Warranty

- 1 Year Limited Warranty  
For additional Warranty information, visit [www.lutron.com/TechnicalDocumentLibrary/369-119\\_Wallbox\\_Warranty.pdf](http://www.lutron.com/TechnicalDocumentLibrary/369-119_Wallbox_Warranty.pdf)


\* Model numbers starting with “PP-” have a range of 7 m (23 ft).

<b>Job Name:</b>	<b>Model Numbers:</b>
<b>Job Number:</b>	


## Pico® Wireless Control Dimensions

Measurements shown as: mm (in)

Front view

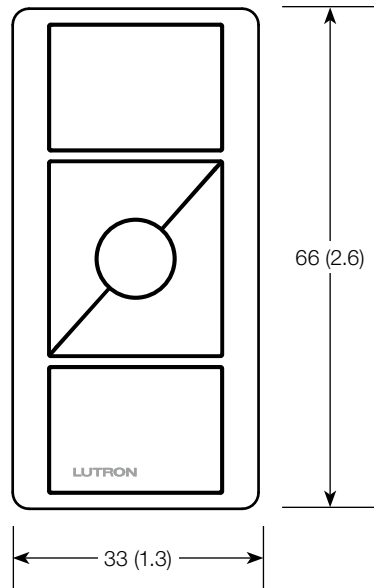

Side view

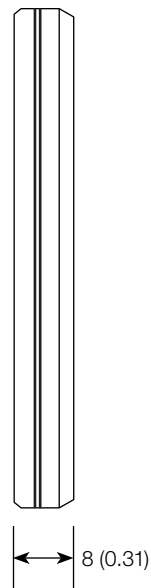


Job Name:

Model Numbers:

Job Number:


## Operation

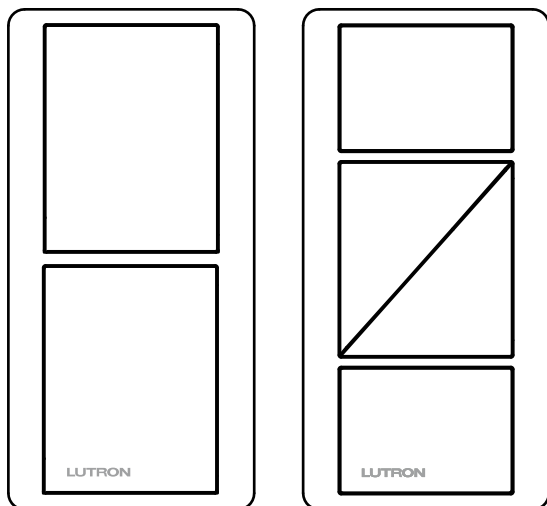

### 2 Button Controls (2B)


Lights Models: **L01, L02** (PP model only)

Screens Model: **S08**

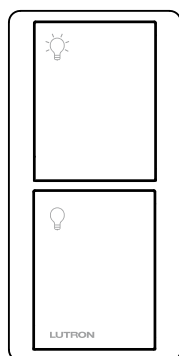

**ON Button**  
Lights go to full intensity.

**OFF Button**  
Lights go to off.

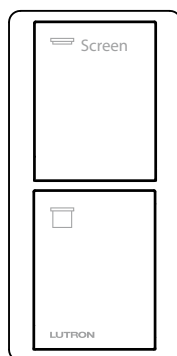


**OPEN Button**  
Screens go to open limit.

**CLOSE Button**  
Screens go to close limit.

### 2 Button Controls with Raise/Lower (2BRL)

Lights Model: **L01**

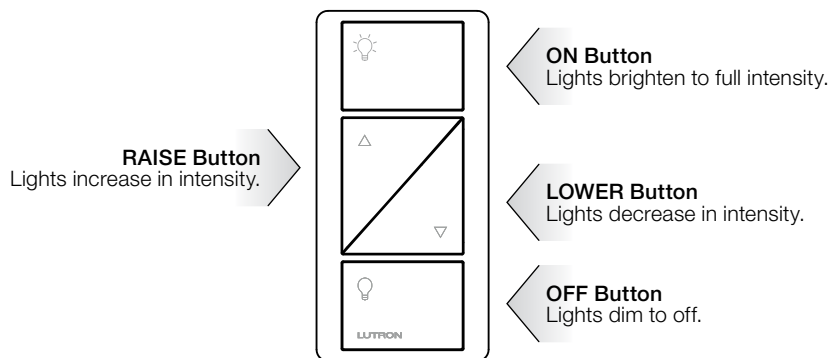

(continued on next page...)

**LUTRON® SPECIFICATION SUBMITTAL**


Page

Job Name:

Model Numbers:


Job Number:

## Operation (continued)

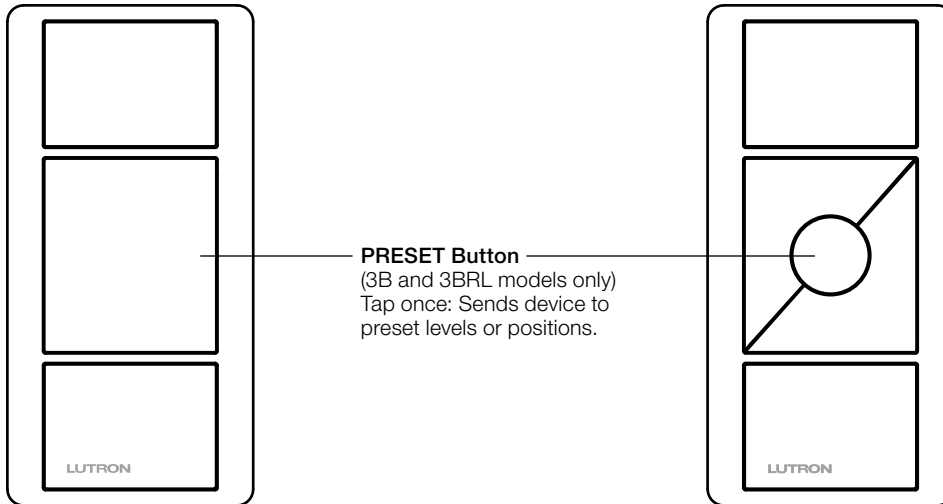


### 3 Button Controls (3B)

Lights Model: **L01, L02** (PP model only)

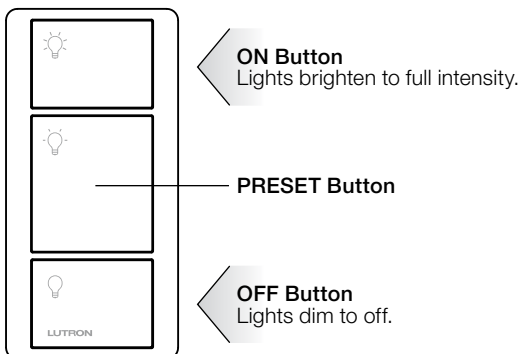


### 3 Button Controls with Raise/Lower (3BRL)

Lights Models: **L01, L02** (PP model only)

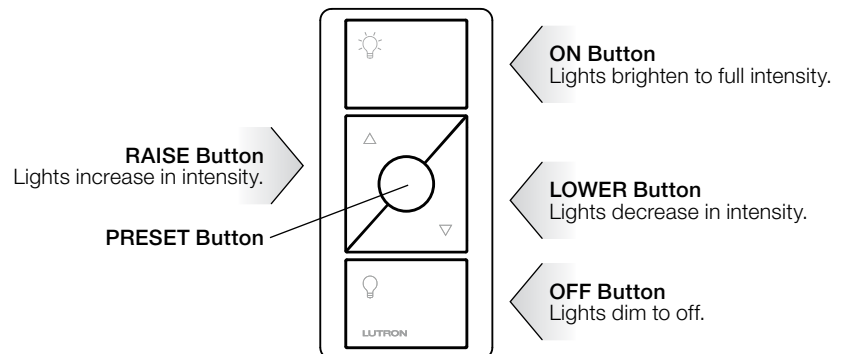

Shades Models: **S01, S02, S03, S04, S06, S07**

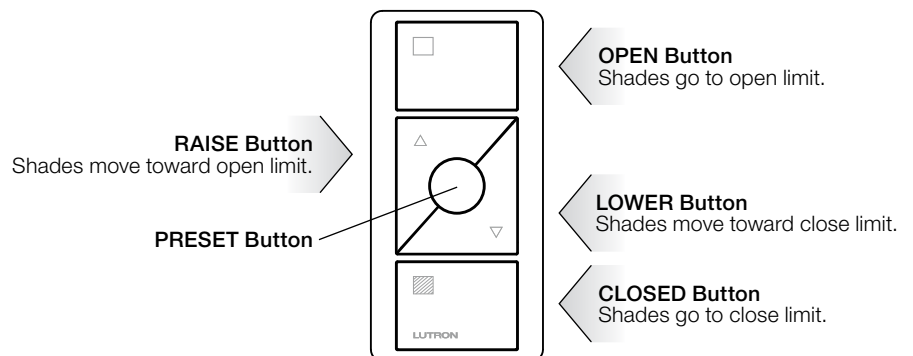


(continued on next page...)

Job Name:

Model Numbers:

Job Number:


## Operation (continued)

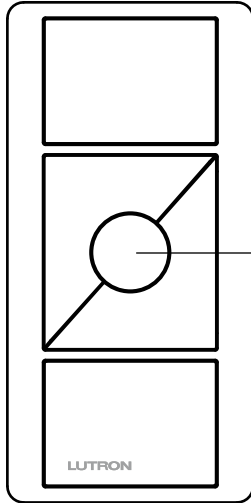


**PRESET Button**  
(3B and 3BRL models only)  
Tap once: Sends device to  
preset levels or positions.

### 3 Button Controls with Raise/Lower (3BRL)

Venetian Blinds/Wood Blinds Model: **S05**

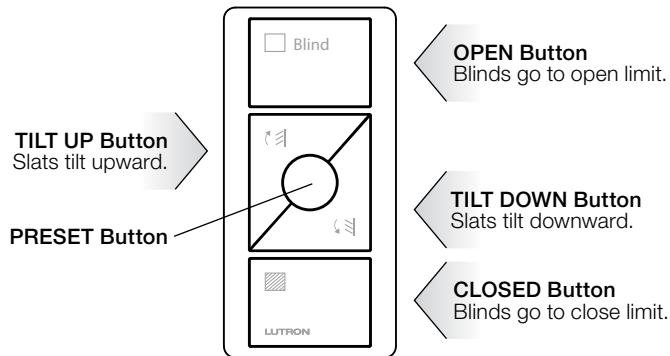

Horizontal Sheer Blinds Model: **S09**

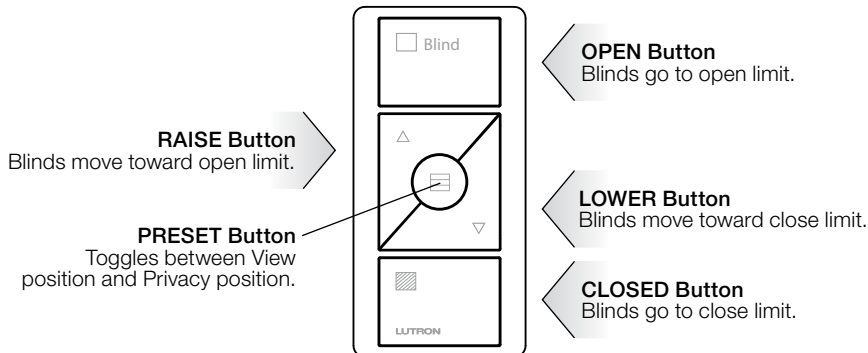

Job Name:

Model Numbers:

Job Number:

## Pico® Wireless Control Model Number

For order quantities of 96 pieces or greater of the same model number, bulk packaging may be available. Mounting hardware is not available with bulk packaging. Contact your local Lutron® sales office.

PX – XXXX – X XX – XXX

Button Marking Codes  
(next page)

### Frequency/Channel Codes\*

Code	Frequency Range	Geographic Region
K	868.0 – 869.8 MHz	Europe, U.A.E.
M	868.0 – 868.5 MHz	China, Singapore
N	865.5 – 866.5 MHz	India
P	312.0 – 315.0 MHz	Japan
Q	433.0 – 434.7 MHz	Hong Kong, Macau

\* For questions about frequency/channel code compatibility, contact your local Lutron® sales office or visit us at [www.lutron.com](http://www.lutron.com)

### Button Configuration Codes

Code	Button Configuration
2B	2 Button
2BRL	2 Button with Raise/Lower
3B	3 Button
3BRL	3 Button with Raise/Lower

### Finish Codes

Finish	Code
Gloss	G**
Texture	T†
Matte	M‡

\*\* Standard for PP- model only

† Standard for non-PP- models

‡ Finish no longer available and has been replaced by "T"

### Color Codes

Color	Code	
	Gloss	Matte
White	WH	AW
Black	BL	BL

(continued on next page...)

Job Name:	Model Numbers:
Job Number:	

## Pico® Wireless Control Model Number (continued)

PX – XXXX – X XX – XXX

Frequency/  
Channel Code  
(previous page)


Button  
Configuration Code  
(previous page)

Finish  
Code  
(previous page)


Color  
Code  
(previous page)

## Button Marking Codes

## 2 Button

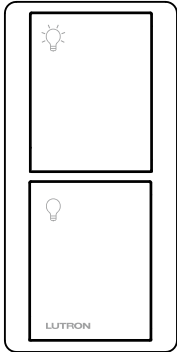


**L01, L02\***: Lights  
(icons only)




**S08**: Screens  
(icons + text)

## 2 Button with Raise/Lower




**L01, L02\***: Lights  
(icons only)

## 3 Button

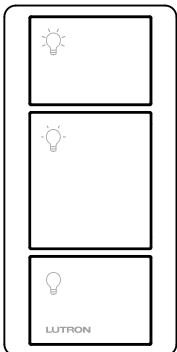


**L01, L02\***: Lights  
(icons only)


## 3 Button with Raise/Lower




**L01, L02\***: Lights  
(icons only)




**S01**: Shades  
(icons only)

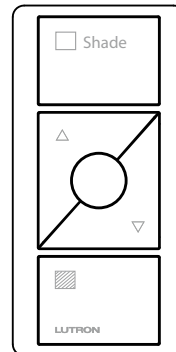


**S02**: Shades  
(icons + text)

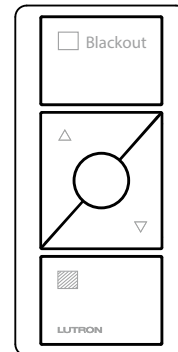


**S03**: Blackouts  
(icons + text)

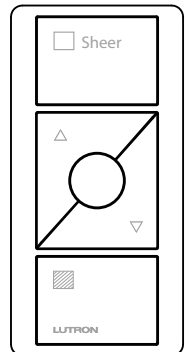


**S04**: Sheers  
(icons + text)




**S05**: Blinds  
(icons + text)



**S06**: Skylights  
(icons + text)

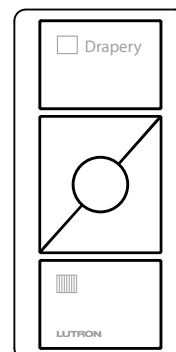

**S07**: Draperies  
(icons + text)

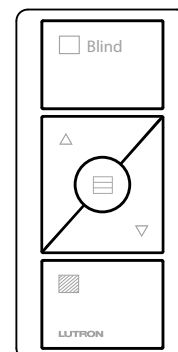

**S09**: Horizontal Sheer Blinds  
(icons + text)

\* PP model only

**LUTRON® SPECIFICATION SUBMITTAL**

Page

Job Name:

Model Numbers:

Job Number:



## Pico® Pedestal Model Number

Pedestals sold separately.

# L – PEDX – XX

### Capacity Codes

Capacity	Code
Single	1
Double	2

### Color Codes


Color*	Code
White	WH
Black	BL

\* Available in gloss finish only.


## Pico® Pedestal Dimensions

Measurements shown as: mm (in)


Single Pedestal

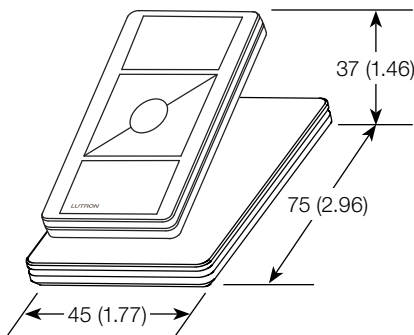


Double Pedestal

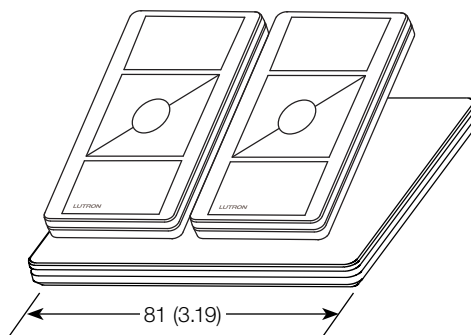

Triple Pedestal\*\*

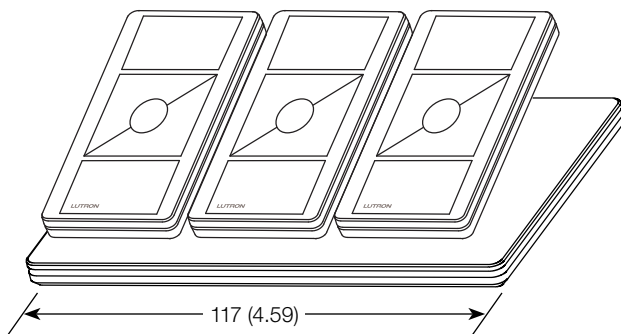

Quadruple Pedestal\*\*

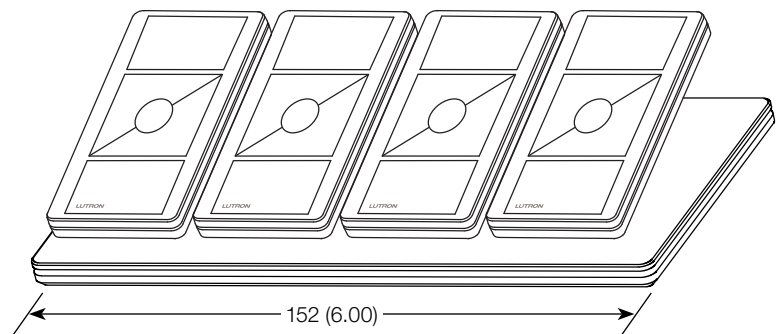

\*\* For Triple and Quadruple Pedestals, contact your local Lutron® sales office or visit us at [www.lutron.com](http://www.lutron.com)

**LUTRON® SPECIFICATION SUBMITTAL**

Page

Job Name:

Model Numbers:


Job Number:

## Mounting Options

### Standalone Mounting

#### Adhesive Mounting


Included with Pico® wireless control

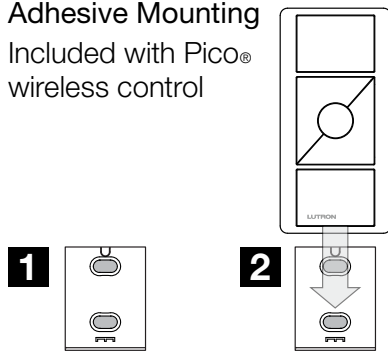

#### Screw Mounting

Model: PICO-SM-KIT (sold separately)


Kit includes special screws to be used for more permanent mounting and/or for non-smooth surfaces.

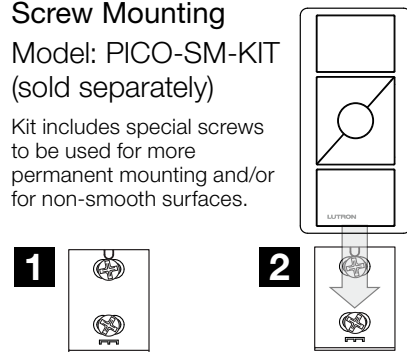

#### Metal Surface Mounting

Model: PICO-MOUNT-1-XX-CPN5733 (sold separately)

Contact your local Lutron® sales office.

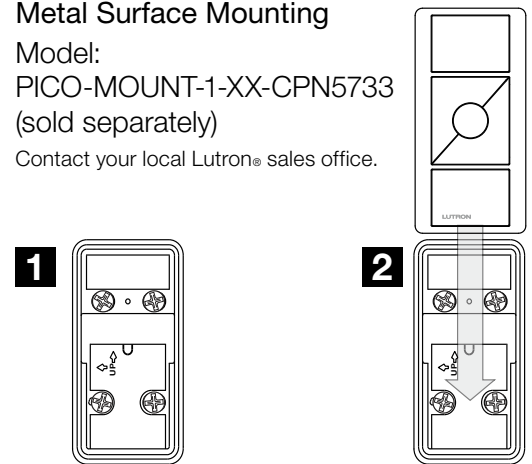


### Wallbox Mounting

#### Wallbox Adapter for Rectangular Wallbox

Model: PICO-WBX-ADAPT (sold separately)

U.S. Style faceplate adapter/faceplate sold separately.

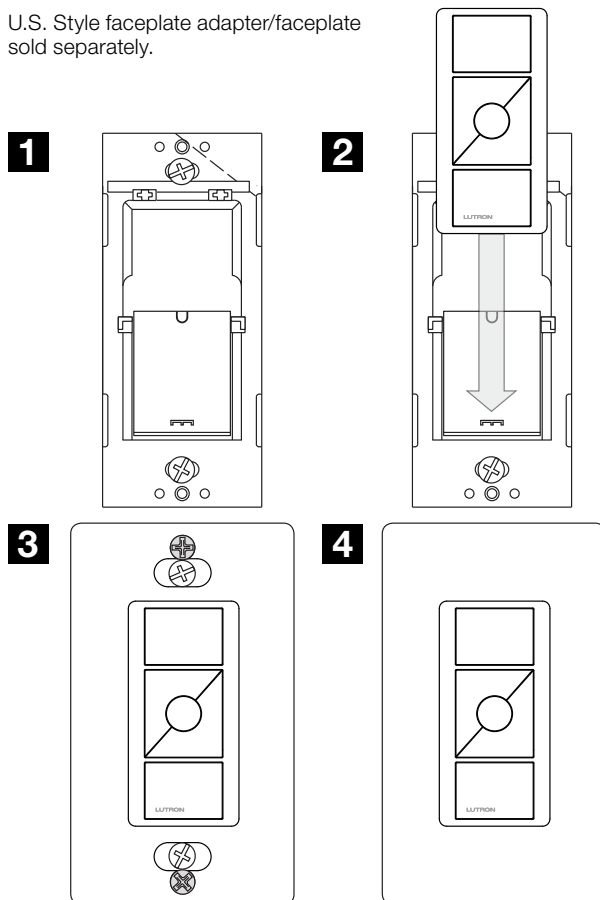


### Wallbox Mounting or Surface Mounting

#### Square Faceplate Kits (Europe/Asia/India)\*


Model: LPFP-S1-XX (sold separately)

Faceplate adapter/faceplate included.

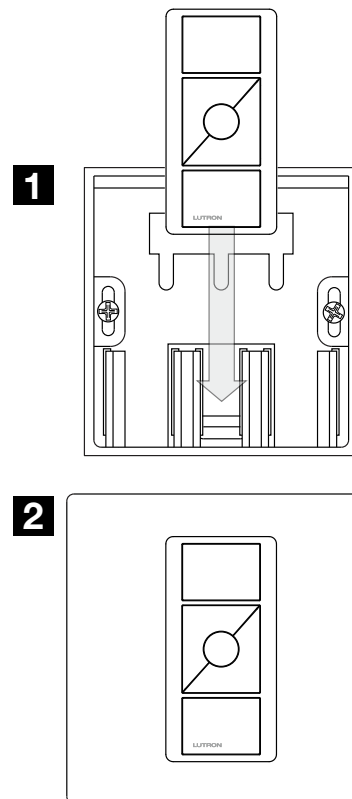

Model: LPFP-S2-XX (sold separately)

Faceplate adapter/faceplate included.

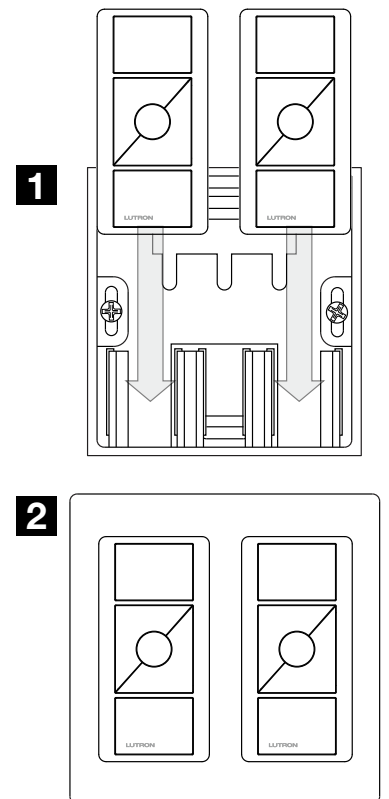

\* For square or round wallboxes

Job Name:

Model Numbers:

Job Number: