



AGELED2X4

Gemini LED Linear 40W White



Features

High specification fully enclosed linear luminaire.

Microprism diffuser for enhanced photometric performance.

Robust steel construction.

Suitable for surface and suspension.

Ideal for most commercial and educational applications.

LED lifespan L70 65,000 hours.

General Information

| | |
|--------------------------------|-------------------|
| Lamp Type | LED |
| Colour / Finish | White |
| IP Rating | IP20 |
| IK Rating | IK07 |
| Class Protection | 1 |
| Internal / External | Internal |
| Surface / Recessed / Suspended | Surface/Suspended |
| Warranty (Years) | 5 |
| CE Mark | Yes |
| Length (mm) | 1230 |
| Width (mm) | 190 |
| Height (mm) | 55 |
| Accessories | ASK1 |

Technical Information


| | |
|------------------|---------------|
| Wattage | 40W |
| Lumens Delivered | 4448lm |
| Lm/W | 108lm |
| CRI | Ra 80 |
| CCT | 4000k |
| Input | 230V |
| Hertz | 50/60Hz |
| Operating Temp | -20°C to 50°C |

Technical Data - ETIM - Ceiling-/wall luminaire (EC002892)

| | |
|--|---------------------------|
| Suitable for wall mounting | No |
| Suitable for suspended mounting | Yes |
| Suitable for ceiling mounting | Yes |
| Suitable for built-in mounting | No |
| Suitable for surface mounting | Yes |
| With light source | Yes |
| Material housing | Steel |
| Colour housing | White |
| Nominal voltage | 230-230 V |
| Control gear included | Yes |
| No dim function | Yes |
| Light distributor | Diffuser lens/optic/panel |
| Degree of protection (IP) | IP20 |
| Impact strength | IK07 |
| Protection class | I |
| Suitable for emergency lighting | No |
| With movement sensor | No |
| With light sensor | No |
| Max. system power | 40 W |
| Rated luminous flux acc. IEC 62722-2-1 | 4448 lm |
| Colour of light | White |
| Colour temperature | 4000-4000 K |
| Colour rendering index CRI | 80-89 |
| Luminaire efficacy | 108 lm/W |
| Width | 190 mm |

Height/depth 55 mm

Length 1230 mm

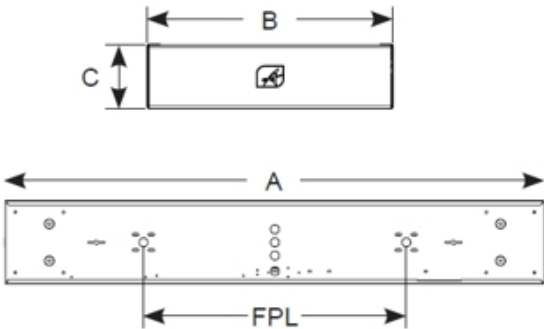

| Code | A | B | C | FPL |
|------------------|------|-----|----|-----|
| AGELED2X4 | 1230 | 190 | 55 | 600 |
| AGELED2X5 | 1510 | 190 | 55 | 880 |

Datasheet generated from <https://onetimepim.com> last updated Monday, September 28, 2020 12:01:37 PM