



AGELED2X5

Gemini LED Linear 54W White



Features

High specification fully enclosed linear luminaire.

Microprism diffuser for enhanced photometric performance.

Robust steel construction.

Suitable for surface and suspension.

Ideal for most commercial and educational applications.

LED lifespan L70 65,000 hours.

General Information

Lamp Type	LED
Colour / Finish	White
IP Rating	IP20
IK Rating	IK07
Class Protection	1
Internal / External	Internal
Surface / Recessed / Suspended	Surface/Suspended
Warranty (Years)	5
CE Mark	Yes
Length (mm)	1510
Width (mm)	190
Height (mm)	55
Accessories	ASK1

Technical Information


Wattage	54W
Lumens Delivered	5291lm
Lm/W	98lm
CRI	Ra 80
CCT	4000k
Input	230V
Hertz	50/60Hz
Operating Temp	-20°C to 50°C

Technical Data - ETIM - Ceiling-/wall luminaire (EC002892)

Suitable for wall mounting	No
Suitable for suspended mounting	Yes
Suitable for ceiling mounting	Yes
Suitable for built-in mounting	No
Suitable for surface mounting	Yes
With light source	Yes
Material housing	Steel
Colour housing	White
Nominal voltage	230-230 V
Control gear included	Yes
No dim function	Yes
Light distributor	Diffuser lens/optic/panel
Degree of protection (IP)	IP20
Impact strength	IK07
Protection class	I
Suitable for emergency lighting	No
With movement sensor	No
With light sensor	No
Max. system power	54 W
Rated luminous flux acc. IEC 62722-2-1	5291 lm
Colour of light	White
Colour temperature	4000-4000 K
Colour rendering index CRI	80-89
Luminaire efficacy	98 lm/W
Width	190 mm

Height/depth 55 mm

Length 1510 mm

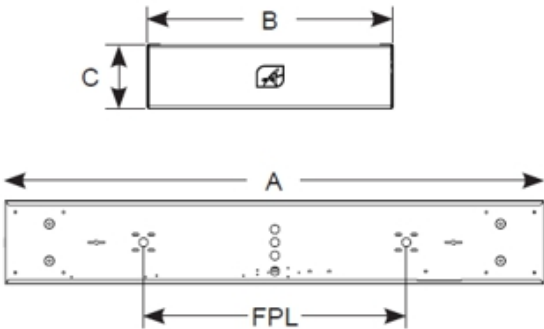

Code	A	B	C	FPL
AGELED2X4	1230	190	55	600
AGELED2X5	1510	190	55	880

Datasheet generated from <https://onetimepim.com> last updated Monday, September 28, 2020 12:01:37 PM