


230V IP65 LED Twin Non-Corrosive Fitting with Emergency



MLA part code	TRLED24EM	TRLED25EM	TRLED26EM
Description	230V IP65 Twin LED Non-Corrosive Emergency Fitting		
Finish	Grey with opal diffuser		
Nett weight (Kg)	2.75	3.25	4.06
Wattage (W)	41	50	69
Lumens(lm)	4670 ± 5%	5800 ± 5%	7770 ± 5%
Efficacy (lm/W)	103	109	111
Efficacy (lm EM mode)	795 ± 5%	650 ± 5%	780 ± 5%
Dimensions (mm)	Width: 129 Length: 1263 Projection: 90	Width: 129 Length: 1563 Projection: 90	Width: 129 Length: 1828 Projection: 90
CCT	4000K		
LED Colour	Cool white		
Beam angle (°)	128	128	128
P.F	0.951	0.946	0.932
CRI	>80		
Life span (Hrs)	25,000		
Input voltage	Mains 230V 50Hz		
Construction	Polycarbonate		
Class	Class I		
IP rating	IP65		
Warranty	5 Years (excluding battery)		
Dimmable	No		
Origin of Manufacture	China		
Declaration of Conformity (held on file)	Yes		
Manufactured in accordance with	BS EN 60598-2-22		
EAN	5055832971122	5055832971160	5055832971207

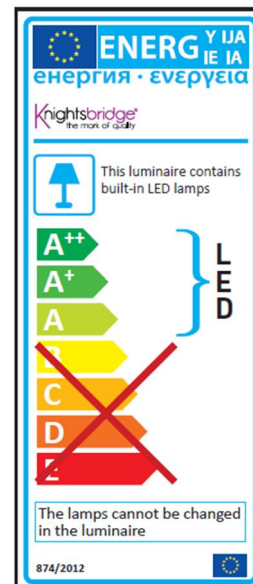