


**230V IP65 LED Twin Non-Corrosive Fitting**



MLA part code	TRLED22	TRLED24	TRLED25	TRLED26
Description	230V IP65 Twin LED Non-Corrosive Fitting			
Finish	Grey with opal diffuser			
Nett weight (kg)	0.122	0.215	0.256	0.346
Wattage (W)	23	41	50	69
Lumens(lm)	3050 ± 5%	4670 ± 5%	5800 ± 5%	7700 ± 5%
Efficacy (lm/W)	110	112	116	117
Dimensions (mm)	Width: 129 Length: 653 Projection: 90	Width: 129 Length: 1263 Projection: 90	Width: 129 Length: 1563 Projection: 90	Width: 129 Length: 1828 Projection: 90
CCT	4000K			
LED Colour	Cool white			
Beam angle (°)	120	120	120	120
P.F	0.947	0.950	0.943	0.928
CRI	>80			
Life span (Hrs)	25,000			
Input voltage	Mains 230V 50Hz			
Construction	Polycarbonate			
Class	Class I			
IP rating	IP65			
Warranty	5 Years			
Dimmable	No			
Origin of Manufacture	China			
Declaration of Conformity (held on file)	Yes			
Manufactured in accordance with	BS EN 60598			
EAN	5055832971085	5055832971108	5055832971146	5055832971184

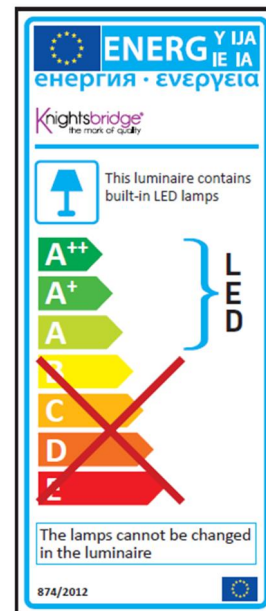