


GRX-CBL-346S Cable

Non-Plenum rated cable for use with the following Lutron systems:

- GRAFIK Eye® 3000
- GRAFIK Eye® QS
- Energi Savr Node™

Specifications

- Listed as type CL3R or CMR cULus.
- Available in 500 ft (150 m) spool.
- Five conductors:
 - Common – 18 AWG (0.75 mm²)
 - Power – 18 AWG (0.75 mm²)
 - MUX Data – 22 AWG (0.25 mm²)
 - MUX Data – 22 AWG (0.25 mm²) } Twisted wire pair
 - Drain Wire – 24 AWG (0.2 mm²)
- Total Outer Jacket Diameter: 0.21 in (5.3 mm).
- 300 V Rated.
- PVC sheath, 75 °C rated.
- UL Listed.
- Rated FT4.
- cULus or CSA Listed.
- Capacitance of 22 AWG (0.25 mm²) Twisted Wire Pair:
 - Conductor to shield: 48 pf/ft max
 - Conductor to Conductor: 25 pf/ft max

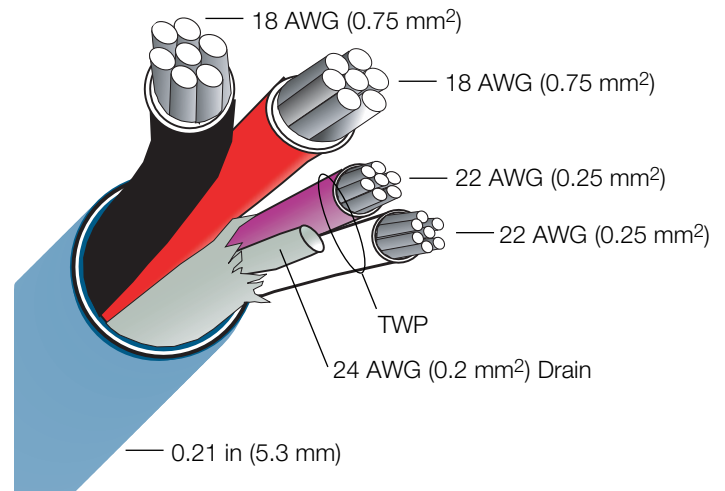

* Please refer to the Product Specification Submittal Sheets or Product Installation Guides for control link wiring distance maximums and other limitations.

Job Name:

Model Numbers:

Job Number:


GRX-CBL-46L Cable

Non-Plenum rated cable for use with the following Lutron systems:

- GRAFIK Eye® 4000
- LCP128™
- Softswitch128®
- GRAFIK 5000™
- GRAFIK 6000®
- GRAFIK 7000™
- Quantum®
- HomeWorks Interactive™
- HomeWorks® QS
- Energi Savr Node™

Specifications

- Listed as type CL3R or CMG cULus.
- Available in 250 ft (75 m) or 500 ft (150 m) spools.
- Six conductors:
 - Common – 12 AWG (4.0 mm²)
 - Power – 12 AWG (4.0 mm²)
 - MUX Data – 22 AWG (0.25 mm²)
 - MUX Data – 22 AWG (0.25 mm²) } Twisted wire pair
 - Sense Line – 18 AWG (0.75 mm²)
 - Drain Wire – 24 AWG (0.2 mm²)
- Total Outer Jacket Diameter: 0.325 in (8.25 mm).
- 300 V Rated.
- PVC sheath, 75 °C rated.
- UL Listed.
- Rated FT4.
- cULus or CSA Listed.
- Capacitance of 22 AWG (0.25 mm²) Twisted Wire Pair:
 - Conductor to shield: 48 pf/ft max
 - Conductor to Conductor: 25 pf/ft max

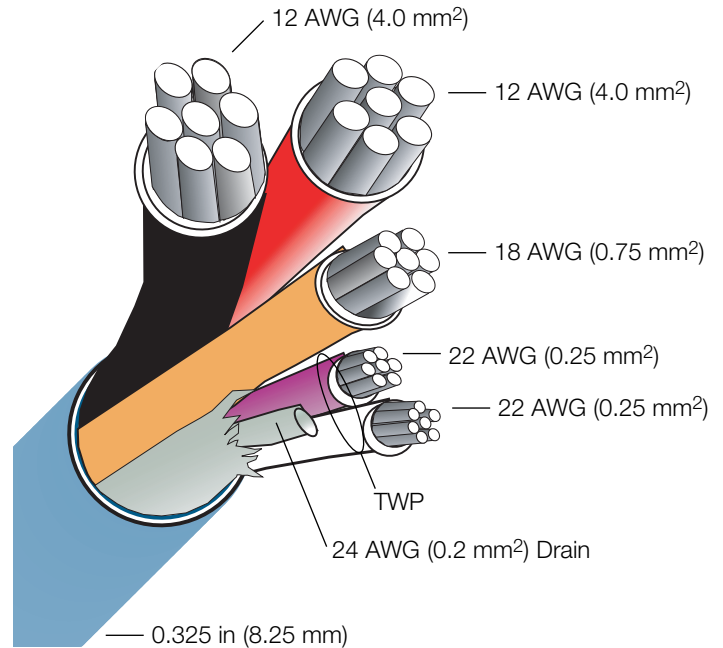

* Please refer to the Product Specification Submittal Sheets or Product Installation Guides for control link wiring distance maximums and other limitations.

Job Name:	Model Numbers:
Job Number:	