

CHANNEL TIMERS




The KingShield 2 & 4 channel central heating & hot water timers offer the equivalent of 4 or 2 separate 7 day timers in one slim, elegant enclosure.


- Up to 4 independently programmable channels (T634A-C)
- 40 on and off settings available per channel
- Programme advance function for each channel
- All products are individually clammed for ease of display



T612A-C

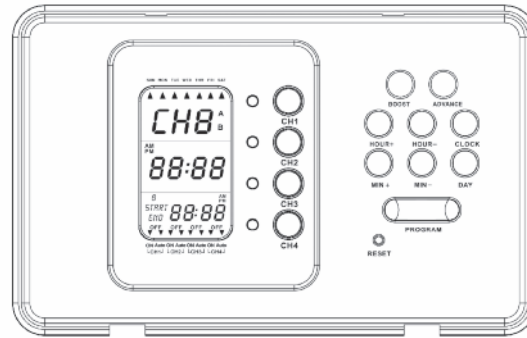

T634A-C

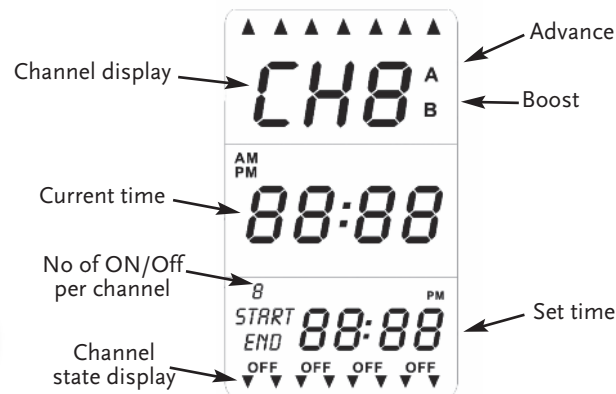

	T612A-C	T634A-C
Product Finish	White	White
Description	1 or 2 Channel Timers	1 - 4 Channel Timer
Product Dimensions	H95 x W154 x D37mm	H95 x W154 x D37mm
Product weight	252g	273g
Barcode	5012739634826	5012739634833
Voltage	230 V AC	230V AC
Display	Clear backlit LED	Clear backlit LED
Max Load	3A Resistive load, 1.25A Inductive per channel	3A Resistive load, 1.25A Inductive per channel
Settings	40 on and off settings available per channel - Summertime setting	40 on and off settings available per channel - Summertime setting
Boost Facility	1 hour boost facility for each channel	1 hour boost facility for each channel
Battery Backup	7 Day	7 Day
Guarantee	1 Year	1 Year
Certification & Conformity	IEC 60730-2-7 and IEC 60730-1	IEC 60730-2-7 and IEC 60730-1



Tel +44 (0) 1279 772 772
 Fax +44 (0) 1279 422 007
 www.greenbrook.co.uk

