



**13AMP SOCKET OUTLETS**

**Standards, Approvals & Directives**

Complies with BS 1363-2: 1995 (Amd 1-3)

Independent test certificates are held as follows:

- Panel Mounted 1 gang switched and unswitched and 2 gang switched socket outlets - Certificate No: C12/43399-1

**Description:**

13amp sockets available as single or double and switched or unswitched.

**Features:**

- Terminals markings present on housing for clearer identification.
- Switch contacts with silver contacts on both surfaces for good continuity.
- Switched socket outlets have double insulated rockers.

**Finishes:**


All 13amp sockets are available with our complete range of plate finishes: Unlacquered Brass, Antique Bronze, Stainless Steel, Polished Nickel, Perspex and Painted.

Matching metal rocker switches available on all switched versions.

Sockets inserts are available in black and white.

<b>Technical Specification</b>	
Supply Voltage:	250V AC
Current Rating:	13A per Socket Outlet
Terminal Capacity:	Live, Neutral & Earth 3 x 2.5mm <sup>2</sup> 3 x 4mm <sup>2</sup> 2 x 6mm <sup>2</sup> (stranded)
Ambient Operating Temperature:	-5°C to +40°C
IP Rating:	IP2XD
Max Installation Altitude:	2000 meters

**13AMP SOCKET OUTLETS**

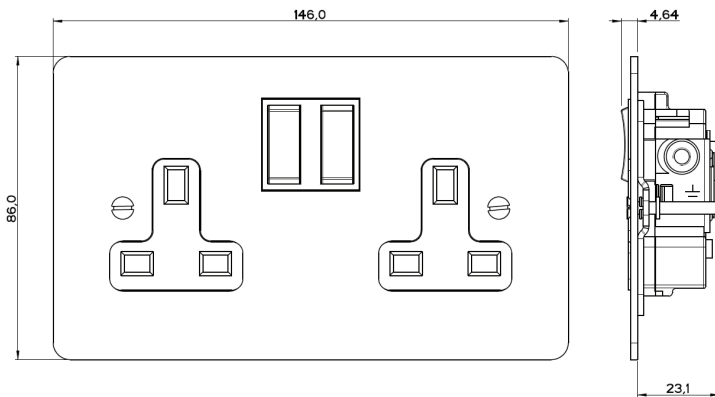


**13Amp Twin Switched Socket Outlet**

**Depth:**

- Twin Un-Switched Socket – 23mm
- Twin Switched Socket – 23mm
- Twin Switched Neon Socket – 23mm

**Recommended Box Depth:**

- 35mm Minimum
- Metal boxes to BS4662

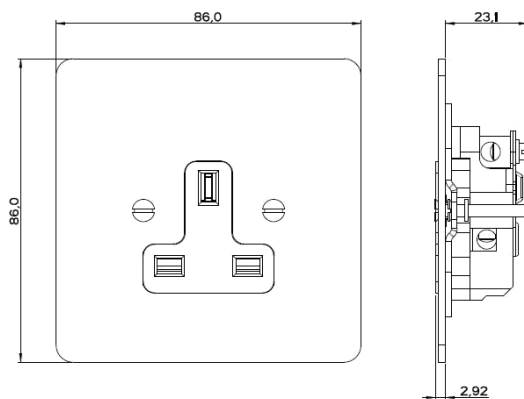

**13Amp Single Unswitched Socket Outlet**

**Depth:**

- Single Un-Switched Socket – 23mm
- Single Switched Socket – 23mm
- Single Switched Neon Socket – 23mm

**Recommended Box Depth:**

- 35mm Minimum
- Metal boxes to BS4662