

# Track - 3 Circuit

## TS4200

## product data sheet

Part code:TS4200-WH



### Description

The Global 3-circuit 16A mains voltage track system. Enabling up to three lighting configurations to be set up on one track, and be controlled and switched individually.

### APPLICATIONS

Ideal for highlighting and general lighting in installations where flexibility is required. Especially suitable for retail displays, museums, art galleries and exhibitions where spotlights may need to be added or removed on a regular basis.

### SALES FEATURES

#### Comprehensive range

Four different track lengths (1M, 2M, 3M & 4M) and wide range of connectors and suspension options, in White or Black. Track Only in White, Black or Silver-grey. Most Illuma spotlights are available with a universal adaptor designed for use with Global Track.

#### Quality

Suitable for direct mounting on flammable surfaces. Guaranteed for five years.

#### Ease of installation

Track lengths are supplied with pre-drilled fixing holes, and can be easily cut and drilled if required. Pre-wired, push-fit track connectors Mains feed can be made via a live-end or anywhere along the track via a centre-feed. Track can be secured to solid or suspended ceilings, or suspended from either. The suspension system can be installed before mounting the track and the height can be adjusted quickly and easily. Comprehensive instructions.


#### Lamp description

N/A

## TECHNICAL SPECIFICATION

### Technical Data

Cut out dia. (mm)	0
IP Rating	20
Weight (kgs)	1.75
Input Voltage(V)	240V
Dimming	Not suitable for dimming

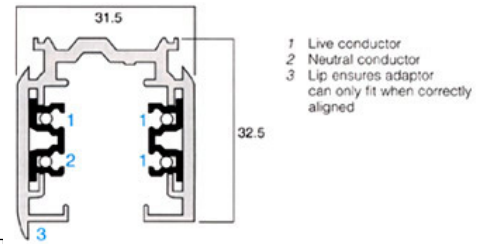

### MATERIALS

Section	Aluminium Extrusion
Insulator	PVC
Conductors	Copper (3mm <sup>2</sup> )
Finish	Powder coated

### LAMP DATA

Lamp Type	Lamp Cap	No.	Lamp Watts	Lamp Current	Lamp Lumens	Lamp Life
-----------	----------	-----	------------	--------------	-------------	-----------