

CANDLE BULB E14 470LM 4.9W 2700K DIMMABLE 240 BEAM CLEAR INTEGRAL

ILCANDE14DC069



This 4.9W retro-fit Integral LED Candle (clear finish, small screw, white base) delivers a dimmable, warm light and brightness, similar to a 40W filament bulb. It features high output LEDs and an anti-glare refractor. Ideal for living rooms, dining rooms, bedrooms and hotels, in classic or modern wall or floor/table lamp fittings and chandeliers.

Details

Quick Order Code:	149266
Barcode:	5055788259282
Category:	Lamps
Range Name:	Everyday
Market Segment:	Commercial indoor, Residential indoor
Warranty (Years):	2
CE RoHS:	Yes

Physical Data

Product Length (mm):	102
Product Width (mm):	35
Product Weight (g):	35
Material:	Plastic, Aluminium, Glass, Nickel plated brass
Base Term:	Edison screw
Bulb Base:	E14
Construction:	Plastic and Aluminium heat-sink, glass diffuser
Globe Finish:	Clear
Globe Type:	Candle
Bulb or Luminaire Shape:	Oval
Placement / Application:	Indoor, General Lighting
Spot Type:	SMD

Electrical Data

Power Consumption (w):	4.9
Power Factor:	0.4
Wattage equivalent (W):	40
Amperage (mA):	30



Dimming:	Dimmable with compatible dimmers
Driver Included:	Yes
Electric Current:	AC
True Wattage Eq (W):	40
EN:	EN-62560
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	470
Luminous efficacy (lm/W):	96
Correlated Colour Temperature (CCT) (K):	2700
Colour Temperature:	2700K - Warm
Colour Temperature Name:	Warm
Beam Angle:	240
Colour Rendering Index (CRI):	80
Colour Type:	Single
Compatible Dimmers:	Varilight
Frequency Range (Hz):	50/60
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	15000
Switching Cycles:	7500

Environment

EN:	EN-62560
LVD Certified:	Yes
CE RoHS:	Yes
Previous Energy Rating:	A+
New Energy Rating:	F
Hg 0% (Mercury Free):	Yes
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	40

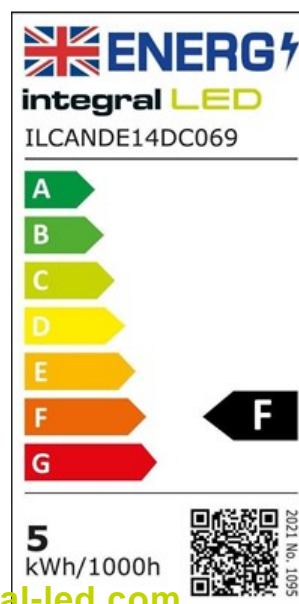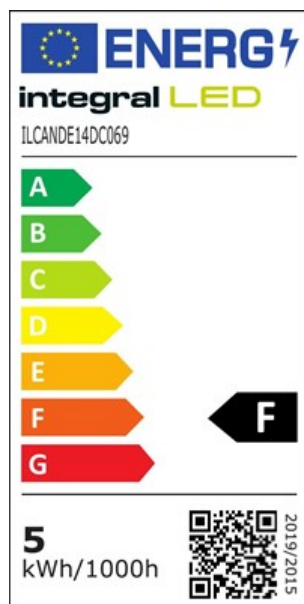

Portal.integral-led.com

Packaging

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Weight (g):	110
Package Length (mm):	120
Package Width (mm):	41
Package Depth (mm):	41