

**SMART GLS BULB E27 806LM 8.5W RGBW 2700K to 6500K TUYA CONTROL
220 BEAM FROSTED INTEGRAL**

ILGLSE27DL176



Effortlessly transform your room with Integral Smart Light GLS. This is the ideal GLS for a space that requires both retrofit lighting and mood lighting so you are able to adjust the tone in your room to match the activity. Control your lighting with smart device via WiFi Tuya Smart app which allows you to switch the light on or off, change the colours or simply choose white light you need from colour temperature 2700K to 6500K, and adjust the brightness. Advanced features available include scheduling options, music sync with adjustable sensitivity and multiple extra running modes.

Details

Quick Order Code:	427322
Barcode:	5055788278580
Category:	Lamps
Range Name:	Smart Light
Product Type:	GLS
Product Body Finish:	Matt white
Market Segment:	Commercial indoor, Residential indoor
Warranty (Years):	2
CE RoHS:	Yes

Physical Data

Product Length (mm):	120
Product Width (mm):	60
Product Weight (g):	47
Material:	Aluminium and plastic
Base Term:	Edison screw
Bulb Base:	E27
Construction:	Plastic and Aluminium heat-sink, Injection moulded diffuser
Globe Finish:	Frosted
Globe Type:	GLS
Bulb or Luminaire Shape:	Round
Placement / Application:	Indoor, General Lighting

Electrical Data



	8.5
Power (W):	8.5
Power Consumption (W) :	0.5
Power Factor:	60
Wattage equivalent (W):	51 to 63
Amperage (mA):	Dimmable via Tuya app control
Dimming:	Yes
Driver Included:	AC
Electric Current:	60
True Wattage Eq (W):	EN-62560, EN300328
EN:	Yes
LVD Certified:	

Light Data

Luminous Flux in Lumens (lm):	806
Luminous efficacy (lm/W):	95
Correlated Colour Temperature (CCT) (K):	2700-6500
Colour Temperature:	RGB+W Tunable
Colour Temperature Name:	RGB+W
Beam Angle:	220
Colour Rendering Index (CRI):	80
Frequency Range (Hz):	50/60
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	15000
Switching Cycles:	7500

Environment

EN:	EN-62560, EN300328
LVD Certified:	Yes
CE RoHS:	Yes
Previous Energy Rating:	A+
New Energy Rating:	F
Hg 0% (Mercury Free):	Yes
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-15
Maximum Operating Temperature (°C):	45

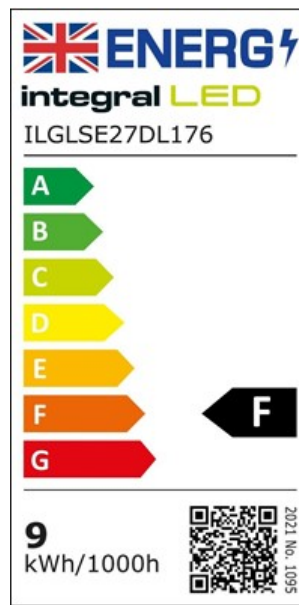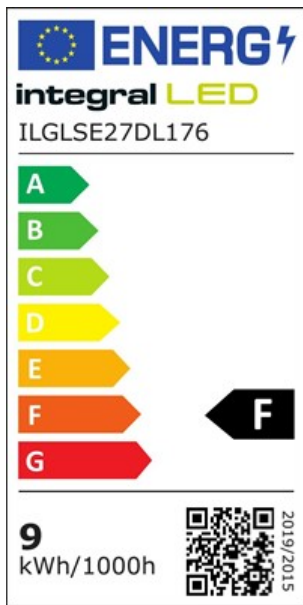

Packaging

Package Weight (g):	62
Package Length (mm):	123
Package Width (mm):	60
Package Depth (mm):	60

Portal.integral-led.com