

GLS BULB B22 806LM 8.8W 5000K NON-DIMM 240 BEAM FROSTED INTEGRAL

ILGLSB22NF073



This 8.8W great all-purpose retrofit Integral LED Classic Globe (GLS) delivers a daylight output equivalent to 60W, offering big energy savings over equivalent incandescent bulbs. With a 806 lumen output and frosted finish this lamp is ideal for rooms with a single pendant fitting, living rooms, hallways and kitchens.

Details

Quick Order Code:	565237
Barcode:	5055788234197
Category:	Lamps
Range Name:	Everyday
Product Type:	GLS
Market Segment:	Commercial indoor, Residential indoor
Warranty (Years):	2
CE RoHS:	Yes

Physical Data

Product Length (mm):	103
Product Width (mm):	60
Product Weight (g):	30
Material:	Plastic, Polycarbonate
Base Term:	Bayonet cap
Bulb Base:	B22
Construction:	Aluminium and Plastic heat-sink, Injection moulded diffuser
Globe Finish:	Frosted
Globe Type:	GLS
Bulb Fixing:	Pendant, Wall, lamp stand, table lamp
Bulb or Luminaire Shape:	Round
Placement / Application:	Indoor, General Lighting

Electrical Data

Power (W):	8.8
Power Consumption (W) :	8.8
Power Factor:	0.5



Wattage equivalent (W):	60
Amperage (mA):	55
Dimming:	Non-Dimmable
Driver Included:	Yes
Electric Current:	AC
True Wattage Eq (W):	60
EN:	EN-62560
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	806
Luminous efficacy (lm/W):	92
Correlated Colour Temperature (CCT) (K):	5000
Colour Temperature:	5000K - Daylight
Colour Temperature Name:	Daylight
Beam Angle:	240
Colour Rendering Index (CRI):	80
Frequency Range (Hz):	50/60
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	15000
Switching Cycles:	7500

Environment

EN:	EN-62560
LVD Certified:	Yes
CE RoHS:	Yes
Previous Energy Rating:	A+
New Energy Rating:	F
Hg 0% (Mercury Free):	Yes
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	40

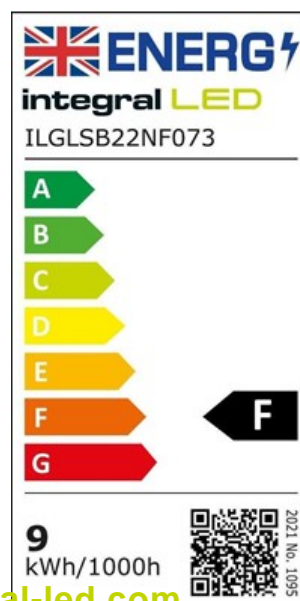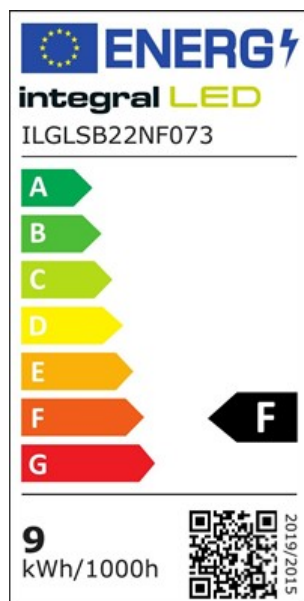

Portal.integral-led.com

Packaging

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Weight (g):	55
Package Length (mm):	120
Package Width (mm):	65
Package Depth (mm):	65
Qty per euro pallet:	1440