





The photograph may not match the reference exactly. Please read the product description to identify the finish.

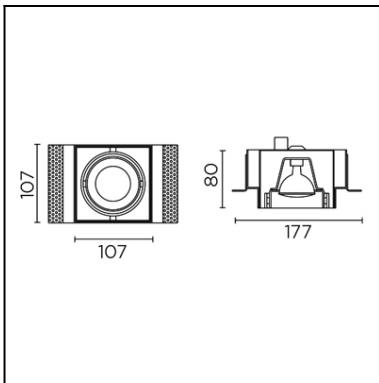

n° 08  
QR-CBC51 50W 60°  
η=100 %



### Description

Recessed downlight produced in steel plate. It does not include a surround thus enabling its fully flush installation in the ceiling. Suitable for different numbers of halogen lamps or LED lamps (with the option of including discharge lamps on request). System allowing a wide angle for directing the light beam of up to 80°. Includes an easily removable cover behind the casing to allow the installation of different sized lamps. Anchor clips included in the unit can be adjusted without the need for additional tools. With the option of incorporating colour filters.

### TECHNICAL CHARACTERISTICS

Type:	DOWNLIGHT RECESSED
Adjustable:	Adjustable $\pm 40^\circ$ around the two axis forming the horizontal plane.
IP Protection degrees:	IP23
Light source 1:	1 x GU5.3 max. 50W Maximum lamp length: 55.00 mm
Voltage / Frequency:	12V/50-60Hz
Warranty (Years):	2
Units per box:	18
Net Weight (Kg):	1.17
EAN:	8435111063125



### MATERIALS / FINISHES


**Structure material:** Steel  
Injected aluminium

**Structure finish:** Black  
Black

### GEAR

Necessary equipment not included. For more information check website / catalogs / sales organization.

Download photometric file .ldt / .ies

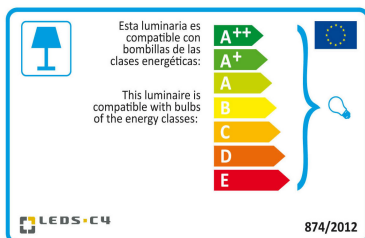


Click on image to download energy label

Luminaire			Measurem.			Lamp	
Code	DM-0093-14-00		Code	44870V.WFL/p95/791		Code	QR-CB 50W 60D
Name	MULTIDIR		Name	MULTIDIR		Number	1
Line	Eulumdat		Date	29-04-1994		Position	
Efficiency		100.00%	Coordinate system	CG		Total Flux	1474.00 lm
Maximum value		1430.07 cd	Position	C=0.00 G=0.00		Rotosymmetrical	
Rectangular Luminaire		Length	50 mm	Width	50 mm	Height	10 mm
Rectangular Luminous Area		Length	50 mm	Width	50 mm	Height	0 mm
Horizontal Luminous Area		0.002500 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000605 m2	
Symmetry Type		Rotosymmetrical		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1473.70 lm	
Operator				Source voltage			
Temperature		25.00 °C		Source current			
Humidity		60.00 %		Photocell			
Notes							

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
Eulumdat	QR-CB 50W 60D	QR-CB 50W 60D - 50.00 W	1474.00	50.00	1	
C.I.E.	81 94 97 100 100	D DIN 5040	A60			
F UTE	1.00 B	B NBN	BZ 1 / 4 / BZ 2			


50mm x 50mm






C Halfplanes

180.0 — 0.0




ULOR 0.00 %  
DLOR 99.99 %  
RN 0.00 %

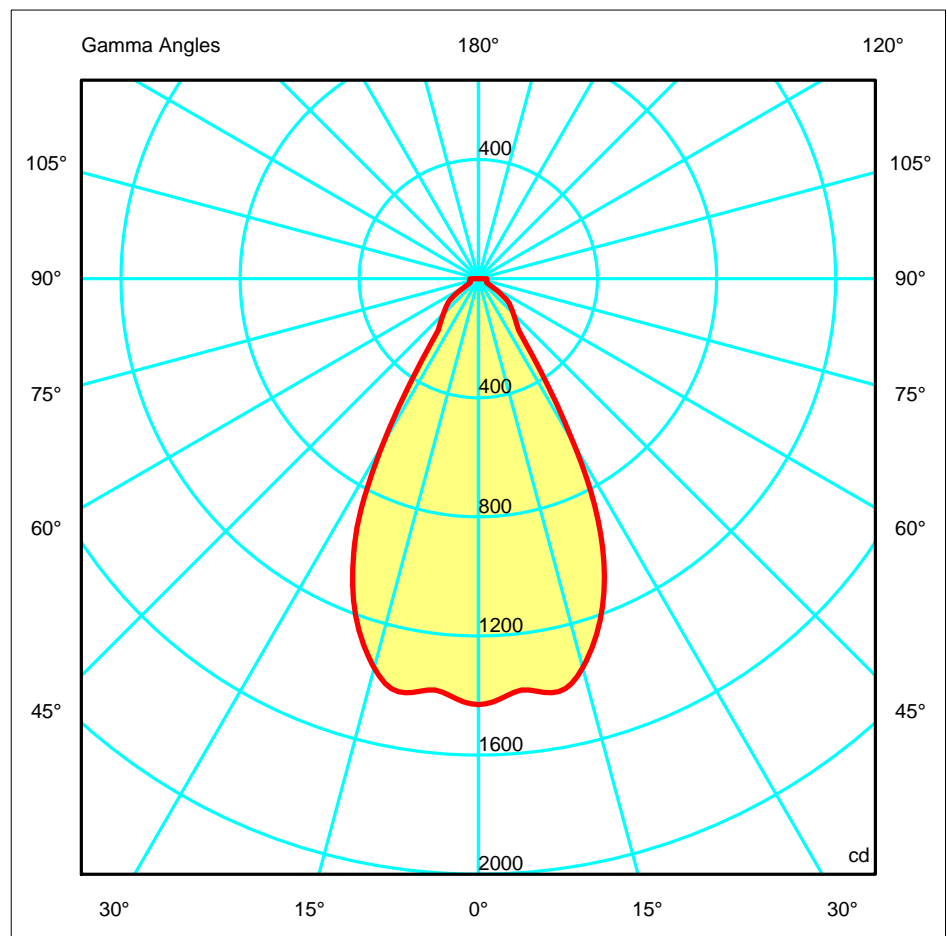

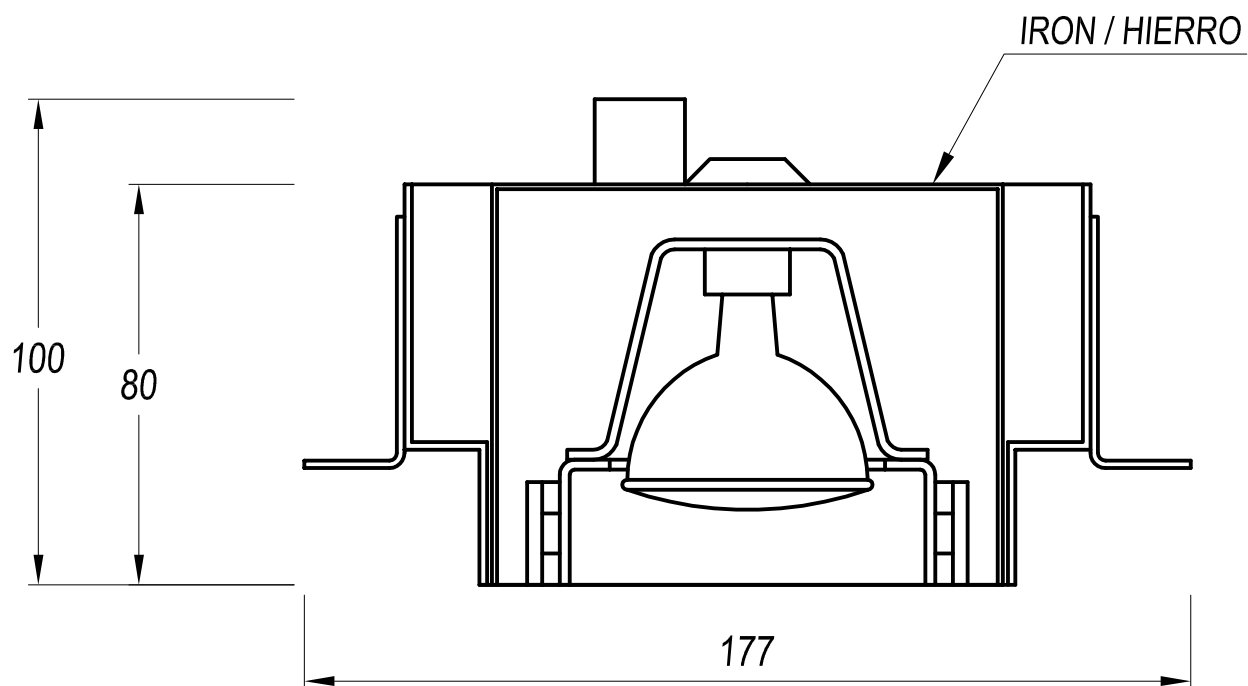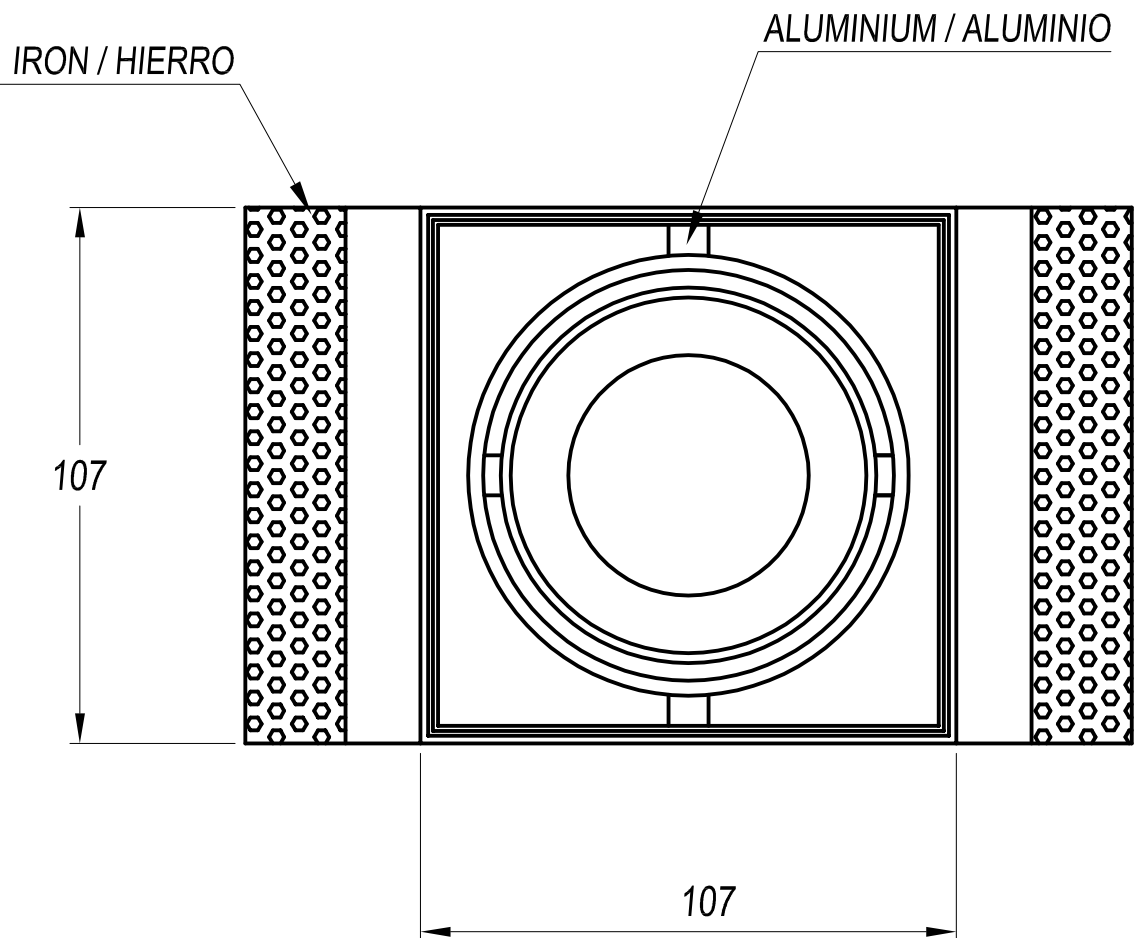

108x108

REF.	⌋	LAMP	SOCKET
DM-0081-60-00	156x156	QR-111 1x100W max.	G53
DM-0081-14-00	156x156	QR-111 1x100W max.	G53
DM-0082-60-00	300x156	QR-111 2x100W max.	G53
DM-0082-14-00	300x156	QR-111 2x100W max.	G53
DM-0083-60-00	444x156	QR-111 3x100W max.	G53
DM-0083-14-00	444x156	QR-111 3x100W max.	G53
DM-0084-60-00	311x311	QR-111 4x100W max.	G53
DM-0084-14-00	311x311	QR-111 4x100W max.	G53
DM-0093-60-00	108x108	QR-CB51 1x50W max.	GU5.3
DM-0093-14-00	108x108	QR-CB51 1x50W max.	GU5.3
DM-0094-60-00	206x108	QR-CB51 2x50W max.	GU5.3
DM-0094-14-00	206x108	QR-CB51 2x50W max.	GU5.3
DM-0095-60-00	304x108	QR-CB51 3x50W max.	GU5.3
DM-0095-14-00	304x108	QR-CB51 3x50W max.	GU5.3
DM-0096-60-00	214x214	QR-CB51 4x50W max.	GU5.3
DM-0096-14-00	214x214	QR-CB51 4x50W max.	GU5.3
DM-1159-60-00	156x156	AR-111 LED 1x15W	GU10
DM-1159-14-00	156x156	AR-111 LED 1x15W	GU10
DM-1160-60-00	300x156	AR-111 LED 2x15W	GU10
DM-1160-14-00	300x156	AR-111 LED 2x15W	GU10
DM-1161-60-00	444x156	AR-111 LED 3x15W	GU10
DM-1161-14-00	444x156	AR-111 LED 3x15W	GU10
DM-1162-60-00	311x311	AR-111 LED 4x15W	GU10
DM-1162-14-00	311x311	AR-111 LED 4x15W	GU10

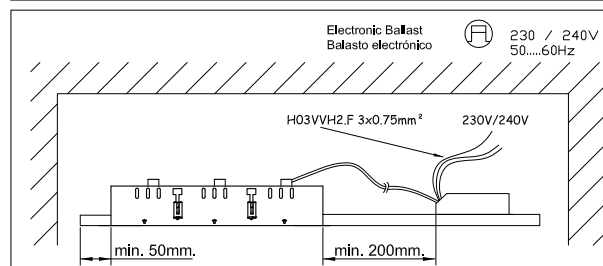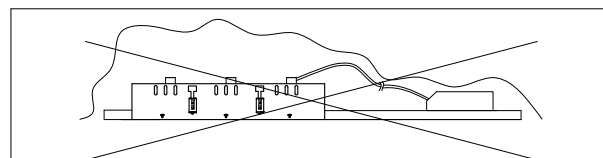

(E) Cubrir toda la longitud del cable de alimentacion con los manguitos termicos.

(F) Couvrir toute la longueur du cable d'alimentation avec les manchons thermiques fournis avec l'appareil.

(GB) All the length of input wiring should be covered with the insulating sleeves provided with the light fitting.

(D) Zuleitung skabel alif sein er ganzen lange mit den warmteisierbuchsenzurauslieferung gelang en be stuck enzu sammen mit der leuchte.

\* AR-111 GU10 LED  / CDM-R111 

