BORGO 55 **7089** SKU 1212010

astro



PRODUCT SPECIFICATION

GENERAL

FINISH:Polished ChromeGROSS WEIGHT:0.24 (lbs)MAIN MATERIAL:Metal - Stainless SteelCLASS:ETL (Class 2)DIMENSIONS:H:170mm W:55mm D: 44mmLISTING LOCATION:Damp

H:1/0mm W:55mm D: 44mm LISTING LOCATION: Damp H:6.69" W:2.16" D:1.73" FITTING METHOD: Recess

H:6.69" W:2.16" D:1.73" FITTING METHOD: Recessed in Drywall Wall

INSTALLATION ORIENTATION: Wall Mount - Vertical ADA COMPLIANT: Yes

CUT OUT HOLE: 160mm x 48mm IC RATING: Non IC Rated

RECESS DEPTH:6.23"/1.89"VOLTAGE:Constant Current 700mAFIRE RATING:Not ApplicablePRODUCT F MARK:Not suitable for mounting

CABLE LENGTH: Not Applicable on flammable materials

LAMP

LIGHT SOURCE:High Power LEDMACADAM ELIPSE:3-StepMAXIMUM WATTAGE:1 x 2WUGR:To Be AdvisedMAXIMUM LAMP LENGTH:Not ApplicableBEAM ANGLE:Not Applicable

MAXIMUM LAMP LENGTH:Not ApplicableBEAM ANGLE:Not ApplicableLAMP INCLUDED?Yes (Integral)TILT ADJUSTMENT ANGLE:Not ApplicableDELIVERED LUMENS:38.8 (Im)ROTATION ADJUSTMENT ANGLE:Not ApplicableCOLOR TEMP:3000 (K)AVERAGE LIFESPAN:54,000 (Hrs)CRI:85L70:To Be Advised

CRI: 85 **L70**: **R9**: To Be Advised

ELECTRICAL

SWITCHED:NoSUPPLY FREQUENCY:Not ApplicableDIMMABLE:YesDRIVER/BALLAST VOLTAGE:Not Applicable

DIMMING METHOD:Control Gear DependantDRIVER AVERAGE LIFESPAN:Not ApplicableDRIVER OUTPUT CURRENT:Not ApplicableEFFICACY:Not Applicable


DRIVER OUTPUT VOLTAGE: Not Applicable DRIVER INCLUDED? No


ADDITIONAL INFORMATION





BOX QUANTITY X16



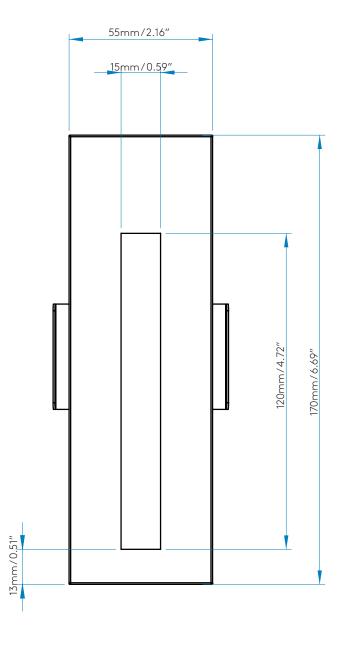

Astro Lighting Inc. 60 Broad Street Suite 3502 NY, NY 10004

T: +1 800-240 7071 (toll free)

T: +1 732-428 5551

E: ctedesco@astrolighting.com

www.astrolighting.com