
TOSCA LED 0699

astro

SKU 1157001





PRODUCT SPECIFICATION

GENERAL

FINISH: Matt Nickel

MAIN MATERIAL: Metal - Zinc

DIMENSIONS: H: 45mm W: 200mm D: 43mm INSTALLATION ORIENTATION: Wall Mount - Horizontal

CUT OUT HOLE:

RECESS DEPTH:

Not Applicable

Not Applicable

FIRE RATING: Not Applicable

CABLE LENGTH:

GROSS WEIGHT:

CLASS:

IP RATING:

Not Applicable

1.17 (kg)

CE (Class I)

IP20

RATHROOM ZONE:

Zone 3

BATHROOM ZONE: Zone 3
VOLTAGE: Mains 230V

PRODUCT F MARK: Suitable for mounting

on flammable materials

LAMP

LIGHT SOURCE: High-Power LED

MAXIMUM WATTAGE: 1W

MAXIMUM LAMP LENGTH:Not ApplicableLAMP INCLUDED?Yes (Integral)LUMINOUS FLUX:61.13 (Im)COLOUR TEMP:2700 (K)CRI:80

R9: To Be Advised

MACADAM ELIPSE: 3-Step

UGR: Not Applicable
BEAM ANGLE: 25.5 (Degrees)
TILT ADJUSTMENT ANGLE: 180 (Degrees)
ROTATION ADJUSTMENT ANGLE: 135 (Degrees)
AVERAGE LIFESPAN: 60,000 (Hrs)
L70: To Be Advised

ELECTRICAL

SWITCHED: Yes SUPPLY FREQUENCY: 50/60 (Hz)

DIMMABLE: No DRIVER/BALLAST VOLTAGE: 100-240 (V)

DIMMING METHOD: Not Applicable DRIVER AVERAGE LIFESPAN: 30,000 (Hrs)

 DRIVER OUTPUT CURRENT:
 350 (mA)
 EFFICACY:
 27.41 (lm/W)


 DRIVER OUTPUT VOLTAGE:
 Not Applicable
 DRIVER/BALLAST INCLUDED?
 Yes (Integral)

ADDITIONAL INFORMATION

CE



BOX QUANTITY X6

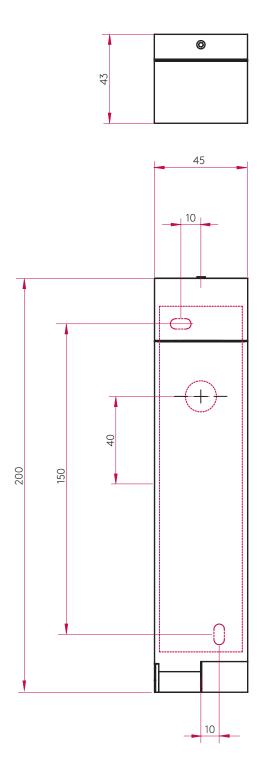

T: +44 (0) 1279 427001 F: +44 (0) 1279 427002 sales@astrolighting.com www.astrolighting.com