



AMICD/BR

iCage Mini Downlight 50W Brass



Features

Suitable for standard GU10 LED or halogen lamps retrofit.

Protective polycarbonate spring clip covers for ceiling protection and ease of installation.

Dedicated forward heat lamps NOT required.

Extra large terminals for fast loop-in, loop-out wiring.

Twistlock lamp retaining ring for ease of lamp replacement.

Ultra-slim bezel profile.

Compact Fire Rated downlight for shallow ceiling voids.

General Information

Lamp Type	GU10
Colour / Finish	Brass
Fire Rated	Yes
IP Rating	IP20
Class Protection	1
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
CE Mark	Yes
Height / Depth	94
Length / Diameter	90
Accessories	AIBOX

Technical Information

Wattage	50W
---------	-----

Technical Data - ETIM 6 - Downlight rigid/swivelling (EC001702)

Suitable for wall mounting	No
Suitable for suspended mounting	No
Lamp type	Mixed light lamp
With light source	No
Lamp holder	GU10
Colour housing	Brass
Suitable for number of lamps	1
Type of control gear	Not required
Control gear included	No
Degree of protection (IP)	IP20
Protection class	I
Length	90 mm
Width	90 mm
Built-in width	68 mm
Lamp power at multiwatt	Not applicable
Emergency unit integrated	No
Built-in length	68 mm
Suitable for ceiling mounting	Yes
Suitable for built-in mounting	Yes
Suitable for surface mounting	No
Adjustability	Not adjustable
Suitable for lamp power	50-50 W
With light sensor	No
With movement sensor	No
Max. system power	50 W


Fit for monitor workplace acc. EN 12464-1 Yes

Type of grid None

Light sharing Symmetric

Light outlet Direct

Height/depth 94 mm

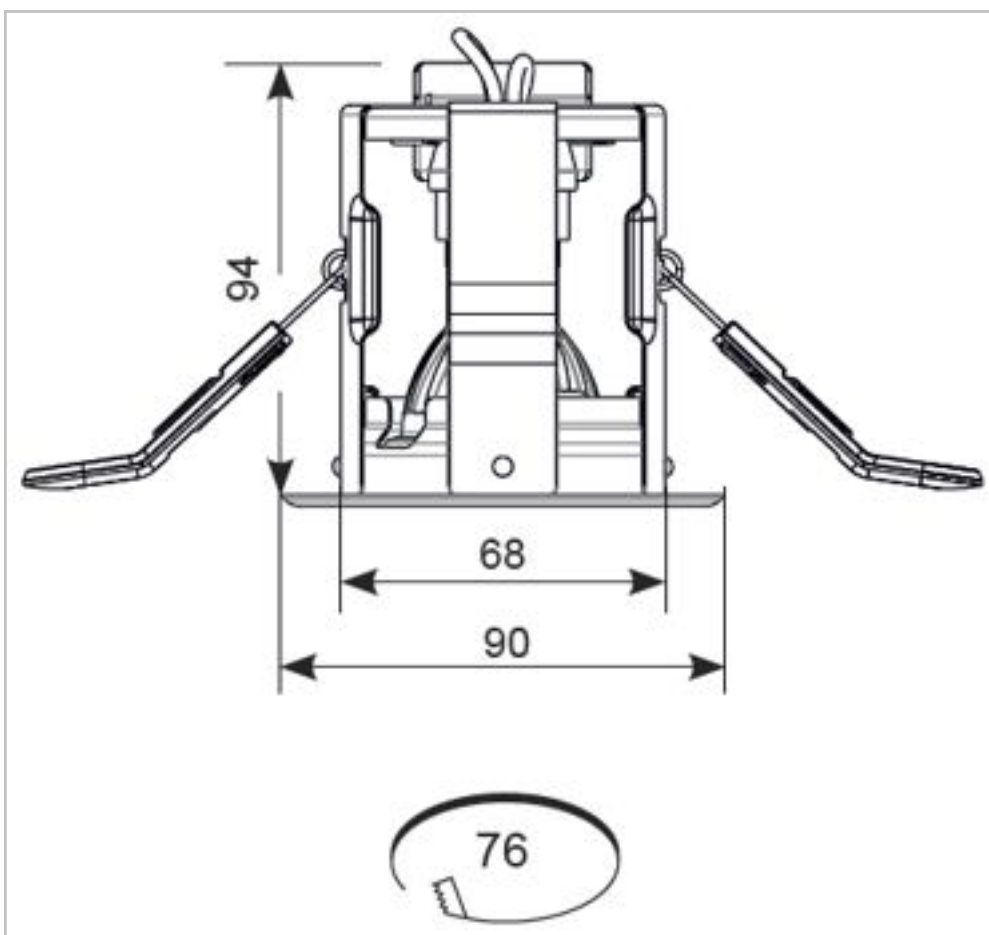

Datasheet generated from <http://www.electrika.com> last updated Thursday, December 7, 2017 12:00:12 PM