
DATA SHEET: SF1200xx



X (F

SCREWLESS 10A INTERMEDIATE SWITCH



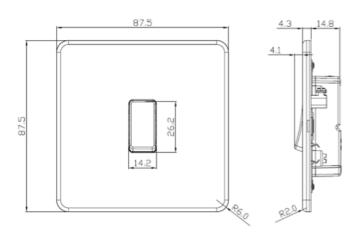

An intermediate switch is used when you have three switches controlling one light. A typical example of this is on a landing. There is a switch at the bottom of the stairs, one at top of the stairs and one at the end of the landing. On this circuit you would need the middle switch to be intermediate (i.e. the one at the top of the stairs) in order for all the switches to function properly

Finish suffix:

Brushed chrome (BC), Polished chrome (PC), Black nickel (BN), Matt black (MB), Polished brass (PB) Matt white (MW)

Colour Insert suffix: N/A Technical information

Dimensions (mm):	87.5 (w) x 87.5 (h) x 4.3(p)
Net. Weight (kg):	0.13
Min. mounting depth:	16mm
Voltage:	230V
Load:	10A
IP Rating:	IP20
Terminal capacity:	2 x 1.0mm2 or 2 x 1.5mm2
Standard:	BS EN 60669-1
Warranty:	15 years
Construction:	Premium grade steel
Origin of manufacture:	China
Quality Assurance System:	IS09001
Declaration of Conformity (held on file):	Yes

