

iCON 60



A stylish low profile fan for discreet ventilation.

iCON 60, designed to provide ventilation levels that meet the latest **Building Regulations ADF**

The airflow iCON fan is an efficient, stylish and unique ventilation solution for the modern home. The shutter design makes switching on and off almost silent, and helps reduce external noise ingress.

The slim profile and iris shutter of the iCON make it a fan which will blend discreetly into any setting.

iCON 60 is the largest, most powerful fan in the range. It is suitable for recessed or surface mounting in walls or ceilings and is highly efficient in domestic kitchens, large bathrooms and utility rooms.

A fan offering both exceptional extraction and stylish appearance...

Application

Ideal for use in large bathrooms, kitchens and Utility rooms

iCON 60



Features

- Flow rate up to 72 l/sec (260 m³/hr)
- Conforms to IPX4 rating.
- Wide range of colours available
- Recessed or surface mounting
- Ductable up to 4m using rigid pipe.
- Unique iris shutter, prevents back draughts, operates silently
- Interchangeable control modules match fan to installation requirements
- Circular design, no squaring up.
- Very simple installation
- 3 year warranty

Model: iC60

Part No: 72591701




For more information please visit airflow.com or email us at info@airflow.com or call **01494 560800**



Why Ventilate?

AIRFLOW fans exceed the requirements of the latest building regulations helping to combat the harmful effects of dampness and condensation and by extracting airborne pollutants such as odours, cooking smells, humid and stale air. The potential hazards to health for occupants and possible damage to the fabric of the building can be largely eliminated.


Model	iCON 60
Extract volume	72 l/sec 260 m³/hr
Sound pressure dB(A) @ 3m	44.6
Impeller	Mixed centrifugal/axial
Mounting (Wall/Ceiling)	Recessed and surface
Weight (Kg)	1.97
Ductable	Up to 4m
Outlet (dia)	150mm (6")
Power (watts)	75
Electrical Supply	230V / 1PH / 50Hz
Maximum ambient temperature	30°C
IP rating	□, △, IPX4

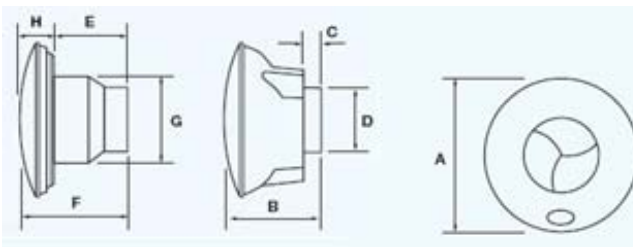

Recessed mounted Surface mounted

Dimensions for iCON 60 (mm):

A-280	B-165.4
C-46.5	D-147.9
E-115	F-170.3
G-176.8	H-55

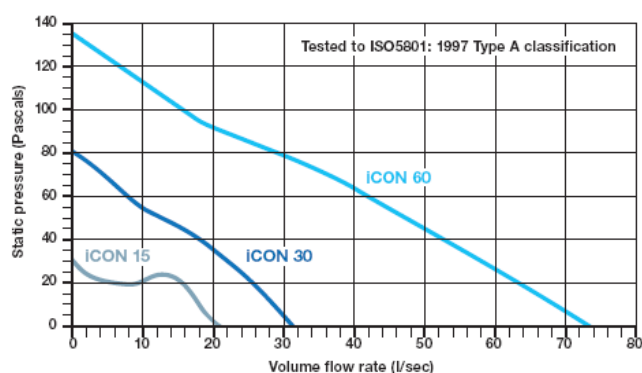

All iCON fans are available with control modules for complete customization. Any fan is compatible with any module so installation really is a case of plug and play simplicity. (See iCON module sheet for more details).

MODULE	CONTROL FUNCTION
Basic	Fan operates by remote switch (optional). No module required
PCM	Pull Cord Manual on/off control by pull cord switch
TM	Timer Adjustable timer 1 to 45 minutes. Remote or light switch operation
HTM	Humidity Adjustable humidity setting 40% to 90% RH, adjustable timer and pull cord boost
PRTM	Infrared Passive infrared activation with adjustable timer overrun
PRHTM	Infrared Passive infrared activation with adjustable humidity setting and adjustable timer overrun
2SM	Two speed On/off by remote switch (optional), starts at full speed and reduces to trickle speed by integral pull cord.

For more information please visit airflow.com or email us at info@airflow.com or call 01494 560800