




## 8W LED integrated fixed fire rated downlights

### Description

The new E8™ fixed and adjustable fire rated downlights set new levels in performance. Featuring the EnFiniti™ low glare multifaceted lens and delivering up to 565lm for Fixed and 595lm for Adjustable from only 8W. The E8™ range is packed with features and benefits which allow for a quick and cost effective installation while still providing users with visual performance and energy saving LED technology.

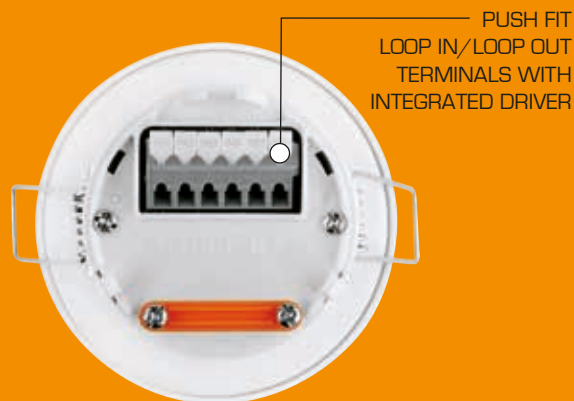


PUSH FIT  
LOOP IN/LOOP OUT  
TERMINALS WITH  
INTEGRATED DRIVER

#### EN-DE8

E8 Fixed 8W Dimmable IP65  
Fire Rated LED Downlight

**8W 565 Lumens**  
**L70 25,000 Hours**

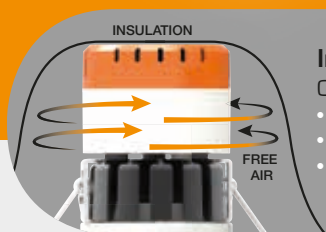

#### Insulation Coverable

Out of the box:

- No accessory required
- No fire cage or hood required
- No insulation cut out required



#### EnFiniti™

EnFiniti™ edge-to-edge multifaceted polycarbonate lens creates low glare and halogen like appearance

Cat. No.	Wattage	Beam	Colour Temp	Lumens	Lumens/W	L70 Life (hrs)	Overall [Ø]	Cutout [Ø]	Recess
<b>DIMMABLE</b>									
EN-DE8/30	8W	60°	3000K	565	71	25,000	85mm	70mm	90mm
EN-DE8/40	8W	60°	4000K	565	71	25,000	85mm	70mm	90mm

Cat. No.	Description	Overall [Ø]
EN-BZE8*	E8 Fixed IP65 Aluminium Downlight Bezel	85mm
<b>NEW</b> EN-FRLM1OEM	3 Hour Maintained LED Emergency Pack	-

\*Add suffix **W**, **MW**, **PC** or **SN** for White, Matt White, Polished Chrome or Satin Nickel finishes:

#### Finish Options:



### Technical Information



#### EN-BZE8

E8 Fixed IP65 Aluminium  
Downlight Bezel



## 8W LED integrated adjustable fire rated downlights



### Features & Benefits

- EnFiniti™ edge-to-edge multifaceted polycarbonate lens creates low glare and halogen like appearance
- Wide 60° beam angle delivers increased light distribution
- Insulation coverable integrated loop in/loop out driver
- Super slim interchangeable bezels for fixed version provide a high end sleek finish. Bezel included with adjustable version.
- Community Design Registration No: EM-002643049
- BS EN 1365-2:2000 (Fire resistance)
- BS EN ISO 140-3:1995 & BS EN ISO 140-6:1998 (Acoustics)
- BS EN 13141-1:2004 (Air leakage) - excluding adjustable version
- **3 year warranty**

BEZEL INCLUDED  
WITH ADJUSTABLE  
VERSION



20° HORIZONTAL  
ADJUSTMENT



#### EN-DE82

E8 Adjustable 8W Dimmable IP20  
Fire Rated LED Downlight

**8W 595 Lumens**  
**L70 25,000 Hours**

Cat. No.	Wattage	Beam	Colour Temp	Lumens	Lumens/W	L70 Life (hrs)	Horz. Adj.	Overall [Ø]	Cutout [Ø]	Recess
<b>DIMMABLE</b>										
EN-DE82 */30	8W	60°	3000K	595	74	25,000	20°	98mm	85mm	110mm
EN-DE82 */40	8W	60°	4000K	595	74	25,000	20°	98mm	85mm	110mm

Cat. No.	Description
----------	-------------

**NEW** EN-FRLM10EM 3 Hour Maintained LED Emergency Pack

\*Add suffix **W**, **MW**, **PC** or **SN** for White, Matt White, Polished Chrome or Satin Nickel finishes:

#### Finish Options:

White	Matt White	Polished Chrome	Satin Nickel

### Technical Information

**Ra >80**  
COLOUR RENDERING



**ErP**  
COMPLIANT

