




## Safe-D F-Clip 30 Flex, Fit, Fold




**Safe-D F-Clip 30 is a fire-rated flexible cable clip that is supplied in flat form, and can be quickly folded to secure cable installations.**

Users simply fold upright those notches which are either side of the 5.7mm fixing hole; to make a U-shape for use in 25x16mm mini trunking, or D-Line 30x15mm mini trunking.

The flat-form is also ideal for shot-fired fixings which can be first-fixed, before sides are inwardly folded to secure cables.

Side notches can also be used to thread steel ties, useful for securing larger bundles of cables.



- Supplied flat...
  - Space efficient and pocket friendly
  - Easier handling - to save installation time
  - Easy folding to consider space and cable volume
  - Perfect for shot fired fixings
- Compliant with BS7671 and BS5839-1 requirements
- >1200°C melting point
- Slots enable use as cable tie base
- 3x fixing holes for versatility, ideal for use with D-Line D-Fixings
- Thumb friendly, rounded corners, 20mm wide, and pliable for easy installation
- Fit direct to surface, or in PVC trunkings
- Easy to later add or remove cable(s)
- Uniquely versatile - for shaping as required


### Code

### Description

SAFEDFLCIP30

(L) 56mm x (W) 20mm x (H) 8mm (folded - max height) 5.7mm diameter pre-drilled hole in base

## Safe-D F-Clip 40 Flex, Fit, Fold & Lock



970°C




2h


**18<sup>th</sup>**  
Edition  
Compliant



Space efficient, pocket friendly & easy to handle

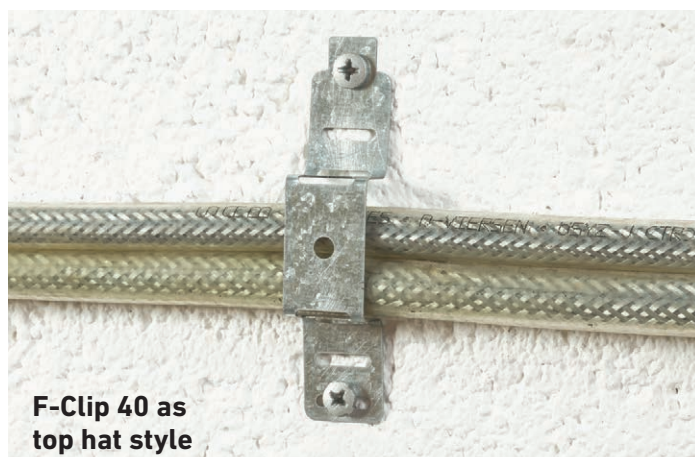

F-Clip 40 as top hat style

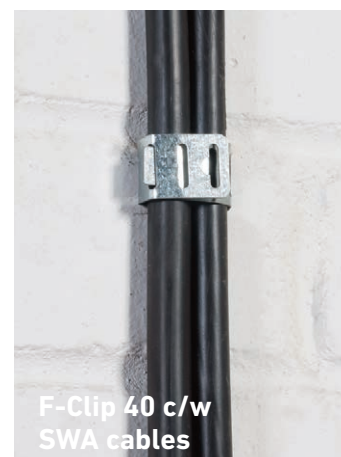


F-Clip 40 c/w SWA cables

**Safe-D F-Clip 40 is a fire-rated flexible cable clip that is supplied in flat form, and can be folded to make a variety of shapes to most effectively secure cable installations.**

Installers can pass the locking tab through a choice of opposing slots, according to the volume of cables to be secured.

The locking tab gives greatest security, and can be return-folded if preferred.

Safe-D F-Clip notches can be flexed (for example to open for adding or removing cables) up to five times, after which replacement F-Clips should be used.

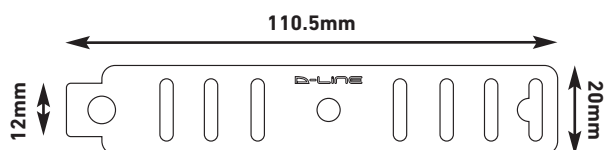

- Supplied flat...
  - Space efficient and pocket friendly
  - Easier handling - to save installation time
  - Easy folding to consider space and cable volume
  - Perfect for shot fired fixings
- Compliant with BS7671 and BS5839-1 requirements
- >1200°C melting point
- Locking feature to hold cables most securely... simply push the tab through the preferred notch
- Locking tabs can be return-folded for extra security
- 3x fixing holes for versatility, ideal for use with D-Line D-Fixings
- Thumb friendly, rounded corners, 20mm wide, and pliable for easy installation
- Fit direct to surface, or in PVC trunkings
- Easy to later add or remove cable(s) - Can be opened/closed up to 5x

### Code


### Description

**SAFEDFCLIP40**

(L) 110.5mm x (W) 20mm x (H) 20mm (folded - max height) 5.7mm diameter pre-drilled hole in base



## Safe-D F-Clip 50 Flex, Fit, Fold & Lock

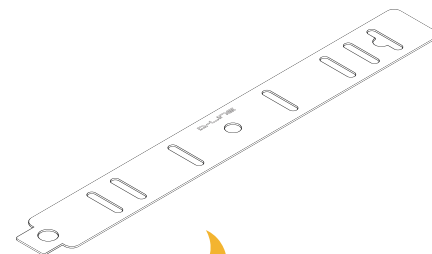

970°C




2h

**18<sup>th</sup>**  
Edition  
Compliant



Shot firing nails

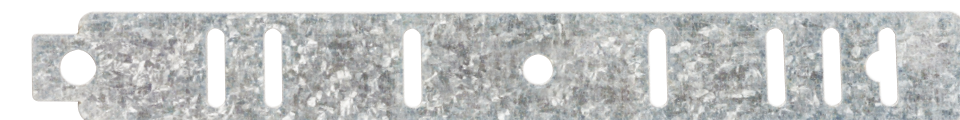

F-Clip 50 c/w temporary electrics



F-Clip 50, shaped triangular in coving




F-Clip 50 c/w FP cables (& locked!)

**Safe-D F-Clip 50 is a fire-rated flexible cable clip that is supplied in flat form, and can be folded to make a variety of shapes to most effectively secure cable installations.**

The first notches (either side of the 5.7mm hole) can be simply folded upward to make vertical tabs; with the base being perfect for use in 50mm width non-metallic trunking. The locking tab can then be passed through any opposing slot, according to the volume of cables to be secured.

Being 165mm long, this F-Clip is most versatile, and can be easily shaped however required, while users appreciate the pocket-friendly design saves handling and fitting time. In fire-conditions F-Clips can withstand 970°C for at least 2 hours, assuring that cable installations will not collapse. F-Clips have been extensively fire-tested on both wall planes and underside ceilings.

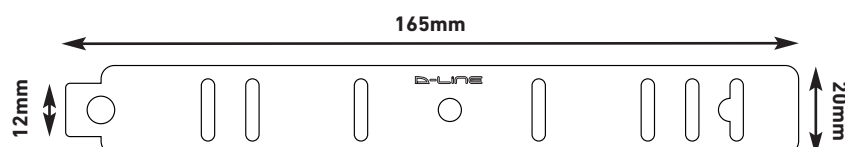

### Code

### Description

**SAFEDFCLIP50**

(L) 165mm x (W) 20mm x (H) 35mm (folded - max height) 5.7mm diameter pre-drilled hole in base

- Supplied flat...
  - Space efficient and pocket friendly
  - Easier handling - to save installation time
  - Easy folding to consider space and cable volume
  - Perfect for shot fired fixings
- Compliant with BS7671 and BS5839-1 requirements
- >1200°C melting point
- Non-corrosive finish
- Locking feature to hold cables most securely... simply push the tab through the preferred notch
- Locking tabs can be return-folded for a more secure installation
- 3x fixing holes for versatility, ideal for use with D-Line D-Fixings
- Fit direct to surface, or in PVC trunkings
- Easy to later add or remove cable(s)
  - Can be opened/closed up to 5x