

## TECHNICAL DATASHEET

### AFL050/CCT/WH


50W IP65 Hunter Slim Design CCT Floodlight White



#### PRODUCT FEATURES

- Easy-Install Angled Bracket
- Tri-Colour Selectable (3000K, 4000K & 6000K)
- Slimline Die-cast Aluminium Construction
- Prismatic Toughened Glass
- Push Terminals for Effortless Install
- Built-in Junction Box

#### DIMENSIONS

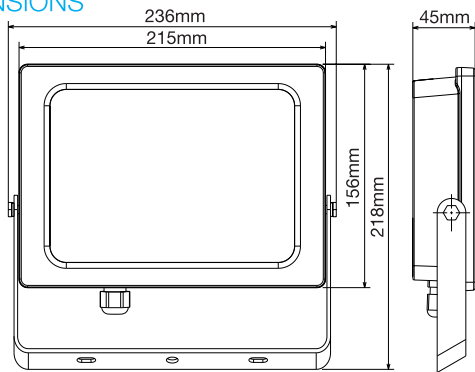

50W



≤4470  
lumens

| Product Code          | AFL050/CCT/WH       |
|-----------------------|---------------------|
| Rated Power           | 50W                 |
| Housing Colour        | Polar White         |
| Operating Voltage     | 220-240V            |
| Frequency             | 50-60Hz             |
| CRI                   | >80                 |
| PF                    | >0.9                |
| Beam Angle            | 120°                |
| Lifetime to LM70      | <30,000 hr          |
| Operating Temperature | -25°C~+40°C         |
| SDCM                  | <6                  |
| Starting Time         | 0.5s                |
| Ingress Protection    | IP65                |
| LED Chip Type         | SMD2835             |
| Guarantee             | 2 years             |
| <b>Lumens</b>         |                     |
| 3000K                 | ≤3780Lm             |
| 4000K                 | ≤4470Lm             |
| 6000K                 | ≤3850Lm             |
| CCT                   | 3000K /4000K /6000K |
| Switching Cycles      | ≤15,000             |
| <b>Peak Intensity</b> |                     |
| 3000K                 | 1360cd              |
| 4000K                 | 1648cd              |
| 6000K                 | 1432cd              |
| Class                 | I                   |

