

ILGOLFB22DC022



This 6.2W retro-fit Integral LED Mini Globe (large bayonet base) delivers a warm light and brightness, similar to a 40W filament bulb. It features high output LEDs and an anti-glare refractor. Ideal for living rooms, dining rooms and bedrooms, in classic or modern wall or floor/table lamp fittings.

### Details

**Barcode:** 5055788202622

**Category:** Lamps

**Range Name:** Everyday

**Product Type:** Golf Ball

**Market Segment:** Commercial indoor, Residential indoor

**Warranty (Years):** 2

**CE RoHS:** Yes

### Physical Data

**Product Length (mm):** 86

**Product Width (mm):** 45

**Product Weight (g):** 78

**Material:** Plastic, Aluminium, Glass, Nickel plated brass

**Base Term:** Bayonet cap

**Bulb Base:** B22

**Construction:** Plastic and Aluminium heat-sink, glass diffuser

**Globe Finish:** Frosted

**Globe Type:** Golf Ball

**Bulb Fixing:** Pendant, Wall

**Bulb or Luminaire Shape:** Round

**Placement / Application:** Indoor, General Lighting

### Electrical Data

**Power (W):** 5.6, 6.2

**Power Consumption (w):** 5.6, 6.2

**Power Consumption (Range):** 5 to 8

**Power Factor:** 0.5

**Voltage Range (v):** 220-240

**Wattage equivalent (W):** 40

**Amperage (mA):** 58


**Dimming:** Dimmable  
**Driver IC Manufacturer:** IWATT  
**Driver Included:** Yes  
**Electric Current:** AC  
**EN:** EN-62560  
**LVD Certified:** Yes

## Light Data

**Luminous Flux in Lumens (lm):** 470  
**Luminous efficacy (lm/W):** 76  
**Correlated Colour Temperature (CCT) (K):** 2700  
**Colour Temperature:** 2700K - Warm  
**Colour Temperature Name:** Warm  
**Beam Angle:** 160  
**Beam Angle (Range):** 90 to 160, 160 to 220  
**Colour Rendering Index (CRI):** 80  
**Compatible Dimmers:** Varilight JQP401W  
**Frequency Range (Hz):** 50  
**Instant on (Less than 1 second):** Yes  
**LED Type:** Surface mounted device (SMD)  
**Lifetime (hours):** 15000  
**Switching Cycles:** 12500

## Environment

**EN:** EN-62560  
**LVD Certified:** Yes  
**CE RoHS:** Yes  
**Energy Rating:** A+  
**Hg 0% (Mercury Free):** Yes  
**IP Rating (Ingress Protection):** IP20  
**Lowest Operating Temperature (°C):** -20  
**Maximum Operating Temperature (°C):** 40

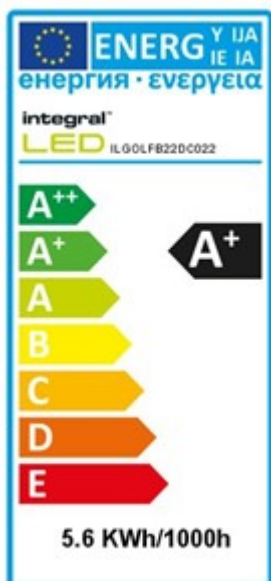

## Packaging

[Portal.integral-led.com](http://Portal.integral-led.com)

Qty per euro pallet: 1500