



IRIS 10W

FOS-10N

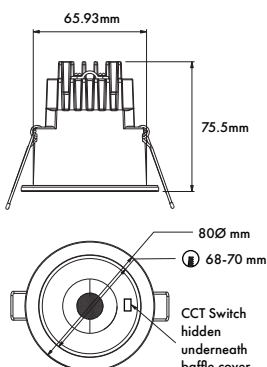

FX
ARC SERIES

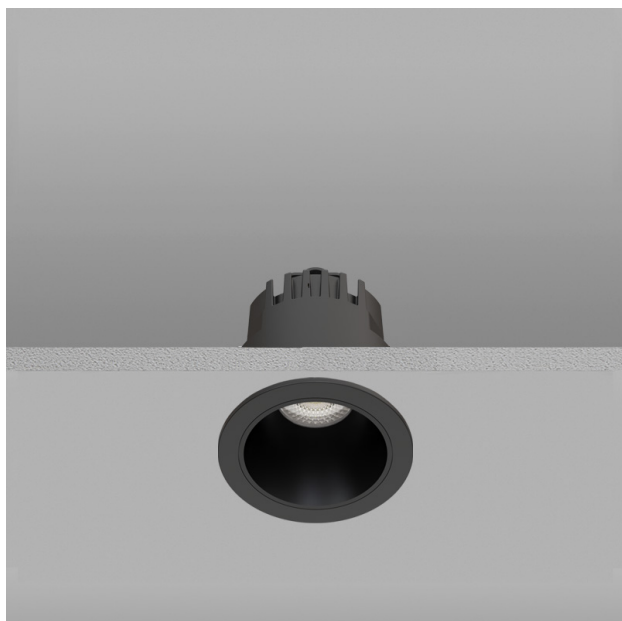

CCT Switchable

3 Kelvin Selections 27K/30K/40K from one product
Easy Switch Access without the need of Downlight Removal

Baffle Colour Selection

Choose from additional Gold or Silver Baffle Covers

Easy Installation

Mains Loop-in and Loop-out Driver feature on
Standard & Mains Dimmable Models

High CRI & Anti Glare

A set back reflector for a low glare rating coupled
with a powerful & Crisp light engine to help enhance
the appearance of colours & objects.

Specifications

Product Code	Finish	Colour Temperature	lm	CRI	PF	Dimming
FOS-10NS	Black	3 IN 1 (2700K - 3000K - 4000K)	610	95	0.90	Switched
FOS-10N	Black	3 IN 1 (2700K - 3000K - 4000K)	610	95	0.90	Mains Dim
FOS-10NO	Black	3 IN 1 (2700K - 3000K - 4000K)	610	95	0.95	Mains OSRAM
FOS-10NZ	Black	3 IN 1 (2700K - 3000K - 4000K)	610	95	0.95	0-10V Dim
FOS-10ND	Black	3 IN 1 (2700K - 3000K - 4000K)	610	95	0.95	DALI Dim
FOS-10NDO	Black	3 IN 1 (2700K - 3000K - 4000K)	610	95	0.98	DALI OSRAM

Product Additions

Product Code	Finish	Description
FOS-10-CB	White	Interchangeable Baffle
FOS-10-CA	Silver	Interchangeable Baffle
FOS-10-CO	Gold	Interchangeable Baffle
3HR-EMS	N/A	3 Hour Emergency Pack
3HR-EMD	N/A	3 Hour Emergency Pack DALI

Client

Date

Project Ref

Product Ref

Quantity



30, 60 and 90 Minutes Fire
Rated



IP65 Rated, suitable for
bathroom Zones 2 & 3.



Insulation coverable



Unified Glare Rating



Beam Angle



Mains, 0-10V & DALI
Dimmable



Colour Rendering Index



5 Year Warranty