


DATA SHEET: BT14 SERIES

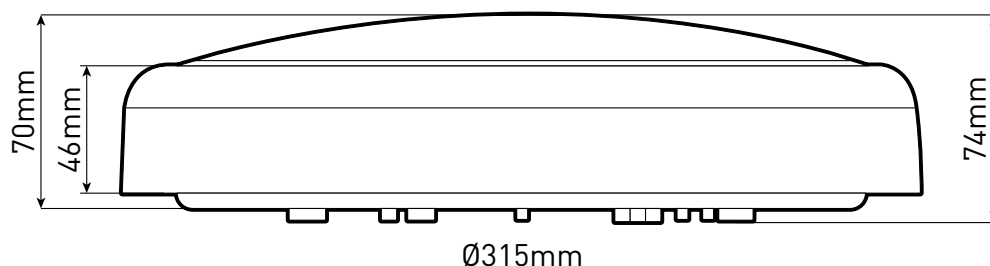

ML Accessories Code	BT14, BT14S, BT14EM, BT14EMS
Description	14Watt LED luminaire Opal diffuser with white trim as standard.
Optional Trim Finishes available	BT14CHR – Chrome bezel accessory
Overall dimensions (mm)	(H)74mm (D)315mm
Product Weight	1.0kg
Recommended product location	Indoor or Outdoor
Lamp Supplied	Yes 14W SMD LED Colour 4000K
Voltage (V)	230V 50Hz
Running current (I)	0.06Amps
Lamp Wattage (W)	14Watts
Lumen Output	910Lm
Dimmable	No
Class	Class II double insulated, should not be earthed
IP	IP44
Distance from lighted object	1.0M
Photometric testing	Yes
Power factor correction	Yes >0.9
Instruction sheet	Yes
Origin of manufacture	China
Main materials:	
• Chassis	n/a
• Body	Polycarbonate
• Diffuser	Polycarbonate
• Screws	Stainless steel cross head
Method of fix	Direct fixing – screws provided
Lamp holder type	n/a
Lamp type and base	Integral LED
Electrical connections	L.N.nylon connector, screw terminals
Running gear / make	Knightsbridge® constant current LED driver Operating temperature - 200C to +350C Optional integral H.F. 3 hour maintained (EM) emergency (2000mAh 6.0V battery) Optional motion sensor (microwave)
CE mark	Yes
Quality assurance system	Yes ISO 9001 QMS
Batch coding details on product	Yes
Certificate of conformity (Held on File)	Yes
Manufactured in accordance to:	BS EN 60598
Warranty period	3 Years